


### CONFIGURATION

X	Control	Not Adjustable
F	Differential Pressure	100 psi (7 bar)
N	Seal Material	Buna-N
	Material/Coating	

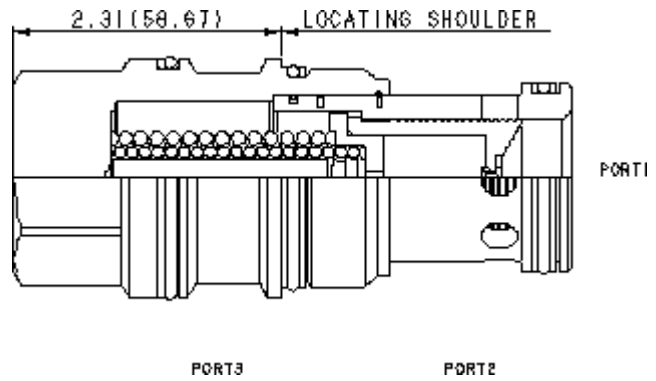

### TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	T-19A
Series	4
Capacity	480 L/min.
Maximum Operating Pressure	350 bar
Valve Hex Size	41,3 mm
Valve Installation Torque	474 - 508 Nm
Seal kit - Cartridge	Buna: 990-019-007
Seal kit - Cartridge	EPDM: 990-019-014
Seal kit - Cartridge	Polyurethane: 990-019-002
Seal kit - Cartridge	Viton: 990-019-006
Seal kit - Cartridge	Buna: 990-019-007
Seal kit - Cartridge	EPDM: 990-019-014
Seal kit - Cartridge	Polyurethane: 990-019-002
Seal kit - Cartridge	Viton: 990-019-006

## OPTION SELECTION EXAMPLE: LRJCXFN

CONTROL	(X)	DIFFERENTIAL PRESSURE	(F)	SEAL MATERIAL	(N)	MATERIAL/COATING
X	Not Adjustable	F	100 psi (7 bar)	N	Buna-N	Standard Material/Coating
L	Tuning Adjustment	G	150 psi (10,5 bar)	E	EPDM	/AP
		H	200 psi (14 bar)	V	Viton	Stainless Steel, Passivated