


3-Port Atmospherically Referenced, Non-adjustable

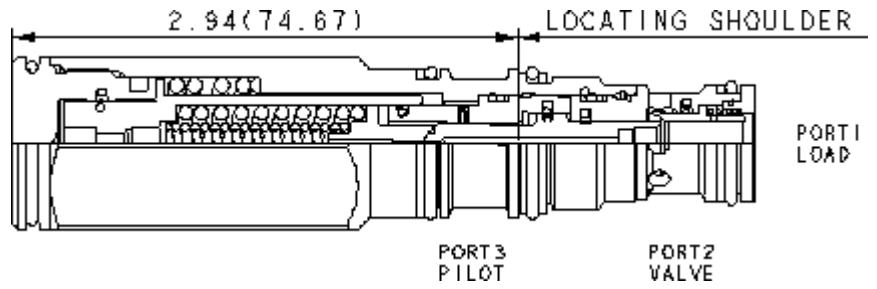

**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

|  |                        |
|--|------------------------|
| cavidad                                  | T-11A                  |
| Series                                   | 1                      |
| Capacity                                 | 60 L/min.              |
| Maximum Operating Pressure               | 350 bar                |
| Maximum Recommended Load Pressure        | See Technical Features |
| Check Cracking Pressure                  | 1,7 bar                |
| Factory Pressure Settings Established at | 30 cc/min.             |
| Maximum Valve Leakage at Reseat          | 0,3 cc/min.            |
| Reseat                                   | ≥77% of setting        |
| Valve Hex Size                           | 25,4 mm                |
| Valve Installation Torque                | 41 - 47 Nm             |
| Seal kit - Cartridge                     | Buna: 990-011-007      |
| Seal kit - Cartridge                     | Viton: 990-011-006     |

# OPTION SELECTION EXAMPLE: MADPDHN

CONTROL

(D) FACTORY SET

(H) SEAL MATERIAL

(N)

D LoadMatch™

H 4000 psi (280 bar)

N Buna-N

G 6000 psi (420 bar)

V Viton

J 5000 psi (350 bar)

## PERFORMANCE CURVES

