


3-Port Atmospherically Referenced, Non-adjustable

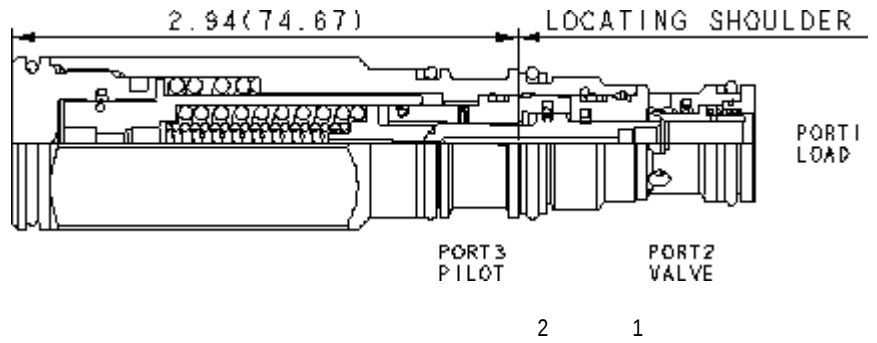

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-11A
	1
	60 L/min.
	350 bar
	See Technical Features
	1,7 bar
	0,3 cc/min.
	30 cc/min.
	≥77% of setting
	25,4 mm
	41 - 47 Nm
Seal kit - Cartridge	Buna: 990-011-007
Seal kit - Cartridge	Viton: 990-011-006
Seal kit - Cartridge	Buna: 990-011-007
Seal kit - Cartridge	Viton: 990-011-006

OPTION SELECTION EXAMPLE: MADPDHN

(D)

(H)

(N)

D LoadMatch™

H 4000 psi (280 bar)

N

G 6000 psi (420 bar)

V

J 5000 psi (350 bar)

TECHNICAL FEATURES

-
-
-
- 4000 1 0.07cc
- 3
- 3
- G 4625psi 319bar G 5800-6350 psi(400-438 bar)
- H 3075psi 212bar H 3850-4250 psi(265-293 bar)
- J 3850psi 265bar J 4800-5300 psi(331-365 bar)
-
- 3
- Sun
-
-
- Sun

PERFORMANCE CURVES

