


3-Port Atmospherically Referenced, Non-adjustable

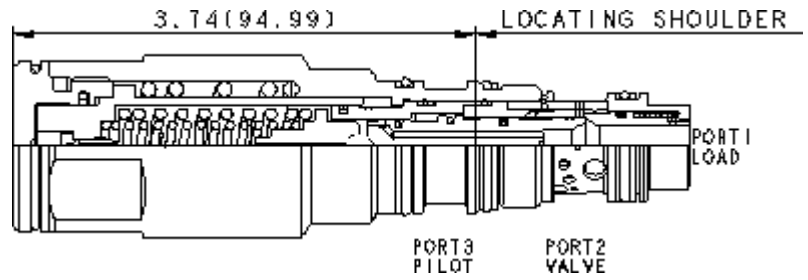

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Maximum Operating Pressure	350 bar
Maximum Recommended Load Pressure	See Technical Features
Check Cracking Pressure	1,7 bar
Factory Pressure Settings Established at	30 cc/min.
Maximum Valve Leakage at Reseat	0,3 cc/min.
Reseat	≥77% of setting
Seal kit - Cartridge	Buna: 990-202-007
Seal kit - Cartridge	Polyurethane: 990-002-002
Seal kit - Cartridge	Viton: 990-202-006
Seal kit - Cartridge	Buna: 990-202-007
Seal kit - Cartridge	Polyurethane: 990-002-002
Seal kit - Cartridge	Viton: 990-202-006

CONFIGURATION OPTIONS

Model Code Example: MAEPDHN

CONTROL	(D) FACTORY SET	(H) SEAL MATERIAL	(N) MATERIAL/COATING
D LoadMatch™	H 4000 psi (280 bar) G 6000 psi (420 bar) J 5000 psi (350 bar)	N Buna-N V Viton	N Standard Material/Coating /LH Mild Steel, Zinc-Nickel