


3-Port Atmospherically Referenced, Non-adjustable

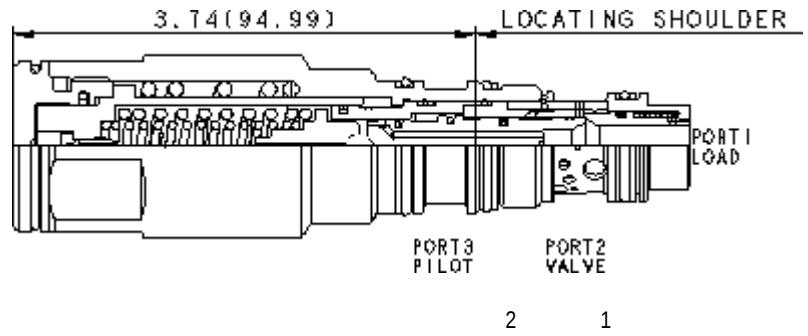

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-2A
	2
	120 L/min.
	350 bar
	See Technical Features
	1,7 bar
	0,3 cc/min.
	30 cc/min.
	≥77% of setting
	34,9 mm
	61 - 68 Nm
Seal kit - Cartridge	Buna: 990-202-007
Seal kit - Cartridge	Polyurethane: 990-002-002
Seal kit - Cartridge	Viton: 990-202-006
Seal kit - Cartridge	Buna: 990-202-007
Seal kit - Cartridge	Polyurethane: 990-002-002
Seal kit - Cartridge	Viton: 990-202-006

: • “ ”

OPTION SELECTION EXAMPLE: MAEPDHN

(D)	(H)	(N)	MATERIAL/COATING
D LoadMatch™	H 4000 psi (280 bar)	N	Standard Material/Coating
	G 6000 psi (420 bar)	V	/LH -
	J 5000 psi (350 bar)		

TECHNICAL FEATURES

-
-
-
-
- 4000 1 0.07cc
- /AP /LH
- 3
- 3
-
- G 4625psi 319bar G 5800-6350 psi(400-438 bar)
- H 3075psi 212bar H 3850-4250 psi(265-293 bar)
- J 3850psi 265bar J 4800-5300 psi(331-365 bar)
-
- Sun
- 3
-
-
- Sun

PERFORMANCE CURVES

