


3-Port Non-vented, Fixed Setting

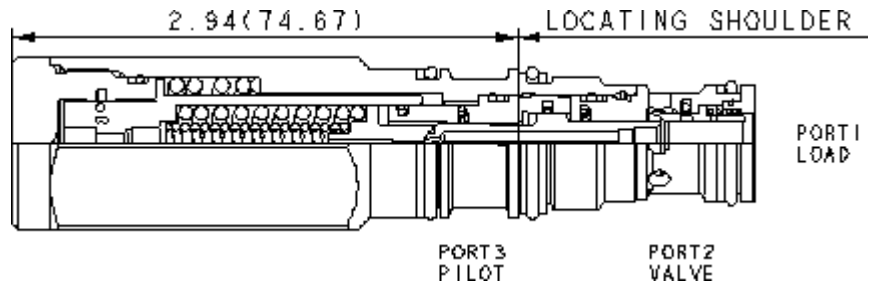

**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	T-11A
Series	1
Capacity	60 L/min.
Maximum Operating Pressure	350 bar
Maximum Recommended Load Pressure	See Technical Features
Check Cracking Pressure	1,7 bar
Factory Pressure Settings Established at	30 cc/min.
Maximum Valve Leakage at Reseat	0,3 cc/min.
Reseat	≥77% of setting
Valve Hex Size	25,4 mm
Valve Installation Torque	41 - 47 Nm
Seal kit - Cartridge	Buna: 990-011-007
Seal kit - Cartridge	Polyurethane: 990-011-002
Seal kit - Cartridge	Viton: 990-011-006

# OPTION SELECTION EXAMPLE: MBDPDHN

CONTROL	(D)	FACTORY SET	(H)	SEAL MATERIAL	(N)	MATERIAL/COATING
<b>D</b> LoadMatch™	<b>H</b> 4000 psi (280 bar)	<b>N</b> Buna-N		<b>IAP</b> Standard Material/Coating		
	<b>G</b> 6000 psi (420 bar)	<b>V</b> Viton		<b>IAP</b> Stainless Steel, Passivated		
	<b>J</b> 5000 psi (350 bar)					

## PERFORMANCE CURVES

