


3-Port Non-vented, Fixed Setting

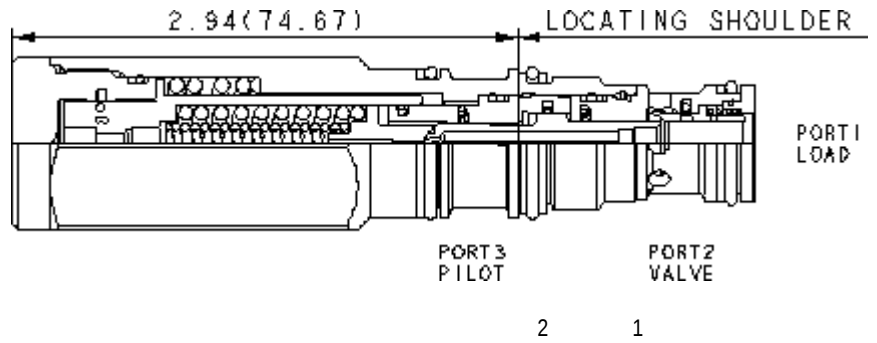

**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-11A
	1
	60 L/min.
	350 bar
	See Technical Features
	1,7 bar
	0,3 cc/min.
	30 cc/min.
	≥77% of setting
	25,4 mm
	41 - 47 Nm
Seal kit - Cartridge	Buna: 990-011-007
Seal kit - Cartridge	Polyurethane: 990-011-002
Seal kit - Cartridge	Viton: 990-011-006
Seal kit - Cartridge	Buna: 990-011-007
Seal kit - Cartridge	Polyurethane: 990-011-002
Seal kit - Cartridge	Viton: 990-011-006

# OPTION SELECTION EXAMPLE: MBDPDHN

	(D)	(H)	(N)	MATERIAL/COATING
<b>D</b> LoadMatch™	<b>H</b> 4000 psi (280 bar)	<b>N</b>		Standard Material/Coating
	<b>G</b> 6000 psi (420 bar)	<b>V</b>		<b>/AP</b>
	<b>J</b> 5000 psi (350 bar)			

## TECHNICAL FEATURES

- 
- 
- 3
- 2
- 3
- /AP
- /LH
- G 4625psi 319bar G 5800-6350 psi(400-438 bar)
- H 3075psi 212bar H 3850-4250 psi(265-293 bar)
- J 3850psi 265bar J 4800-5300 psi(331-365 bar)
- 
- Sun
- 
- 
- Sun

## PERFORMANCE CURVES

