


3-Port Non-vented, Fixed Setting

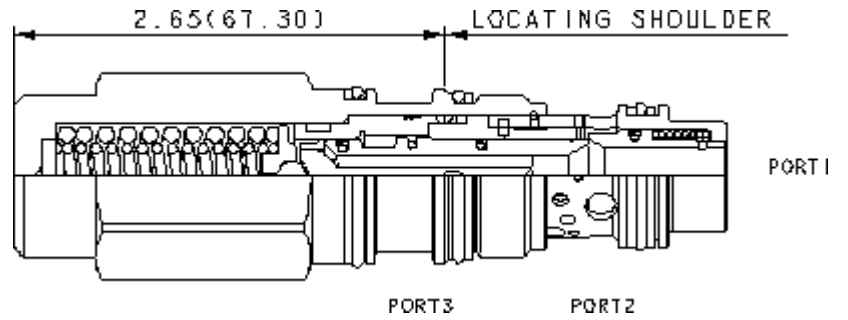

**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

|  |                           |
|--|---------------------------|
| cavidad                                  | T-2A                      |
| Series                                   | 2                         |
| Capacity                                 | 120 L/min.                |
| Maximum Operating Pressure               | 350 bar                   |
| Pilot Ratio                              | 1.5:1                     |
| Maximum Recommended Load Pressure        | See Technical Features    |
| Check Cracking Pressure                  | 1,7 bar                   |
| Factory Pressure Settings Established at | 30 cc/min.                |
| Maximum Valve Leakage at Reseat          | 0,3 cc/min.               |
| Reseat                                   | ≥77% of setting           |
| Valve Hex Size                           | 28,6 mm                   |
| Valve Installation Torque                | 61 - 68 Nm                |
| Seal kit - Cartridge                     | Buna: 990-202-007         |
| Seal kit - Cartridge                     | Polyurethane: 990-002-002 |
| Seal kit - Cartridge                     | Viton: 990-202-006        |

# OPTION SELECTION EXAMPLE: MBEBXLN

FACTORY SET

(L) SEAL MATERIAL

(N)

L 4000 psi (280 bar)

N Buna-N

K 3000 psi (210 bar)

V Viton

M 5000 psi (350 bar)

## PERFORMANCE CURVES

