




3-Port Non-vented

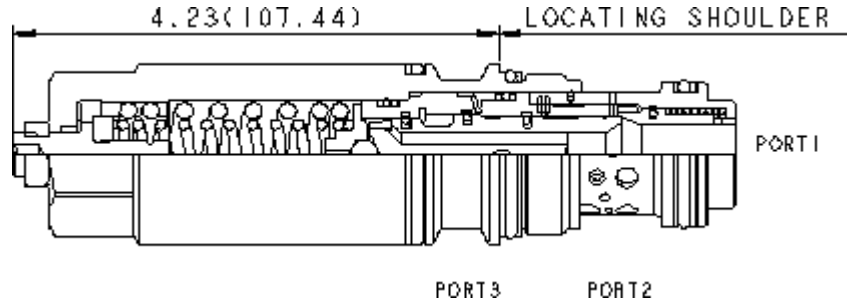

**CONFIGURATION**

<b>L</b> Control	Standard Screw Adjustment
<b>H</b> Functional Setting Range	1000 - 4000 psi (70 - 280 bar), 3000 psi (210 bar) Standard Setting
<b>N</b> Seal Material	Buna-N
Material/Coating	

Load reactive, load control valves with pilot assist combine two valves; a check valve and a relief valve. The check valve allows free flow from the directional valve (port 2) to the load (port 1) while a direct-acting, pilot-assisted relief valve controls flow from port 1 to port 2. Pilot assist at port 3 lowers the effective setting of the relief valve at a rate determined by the pilot ratio.

**TECHNICAL DATA**

Maximum Operating Pressure	5000 psi
Pilot Ratio	1.5:1
Maximum Recommended Load Pressure	See Technical Features
Adjustment - No. of CCW Turns from Min. to Max. Setting	9
Check Cracking Pressure	25 psi
Factory Pressure Settings Established at	2 in <sup>3</sup> /min.
Maximum Valve Leakage at Reseat	5 drops/min.
Reseat	≥77% of setting
Locknut Hex Size	9/16 in.
Locknut Torque	80 - 90 lbf in.
Seal kit - Cartridge	Buna: 990-017-007
Seal kit - Cartridge	Polyurethane: 990-017-002
Seal kit - Cartridge	Viton: 990-017-006

**CONFIGURATION OPTIONS**

**Model Code Example: MBGBLHN**

CONTROL (L)	FUNCTIONAL SETTING RANGE (H)	SEAL MATERIAL (N)	MATERIAL/COATING
<b>L</b> Standard Screw Adjustment	<b>H</b> 1000 - 4000 psi (70 - 280 bar), 3000 psi (210 bar) Standard Setting	<b>N</b> Buna-N	Standard Material/Coating
	<b>J</b> 2000 - 5000 psi (140 - 350 bar), 3000 psi (210 bar) Standard Setting	<b>V</b> Viton	<b>IAP</b> Stainless Steel, Passivated