


3-Port Non-vented, Fixed Setting

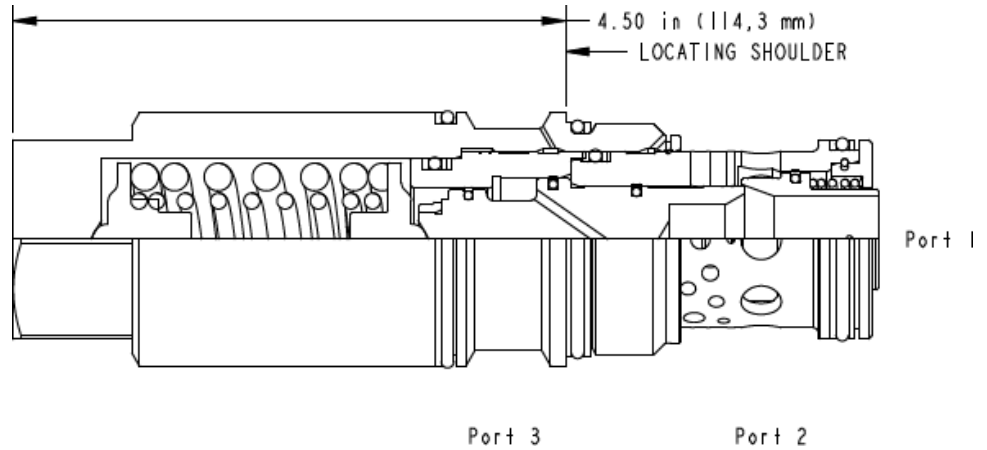

**CONFIGURATION**

L 4000 psi (280 bar)  
V

**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-19A
	4
	480 L/min.
	350 bar
	3:1
	See Technical Features
	1,7 bar
	0,3 cc/min.
	30 cc/min.
	≥77% of setting
	41,3 mm
	474 - 508 Nm
Seal kit - Cartridge	Buna: 990-019-007
Seal kit - Cartridge	Polyurethane: 990-019-002
Seal kit - Cartridge	Viton: 990-019-006

# OPTION SELECTION EXAMPLE: MBIAXLV

(L)

(V)

**L** 4000 psi (280 bar)  
**K** 3000 psi (210 bar)  
**M** 5000 psi (350 bar)

**V**  
**N**

## TECHNICAL FEATURES

- K 2300psi 154bar K 3350psi 210bar
- L 3075psi 215bar L 4350psi 300bar
- K 3850psi 270bar M 5350psi 370bar
- 
- ±50psi 3.5bar ±350psi(20bar)
- 
- 2 , 1+ x
- 3
- 
- 3
- 
- Sun
- 
- 
- Sun

## PERFORMANCE CURVES

