


3-Port Non-vented, Fixed Setting

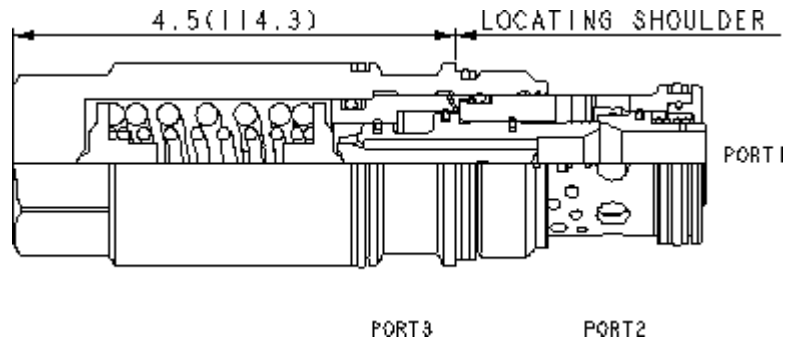

**CONFIGURATION**

L	4000 psi (280 bar)
N	
	Material/Coating

**TECHNICAL DATA**

NOTE:

	T-19A	DATA
	4	MAY
	480 L/min.	VARY
	350 bar	BY
	4.5:1	
	See Technical Features	
	1,7 bar	
	0,3 cc/min.	
	30 cc/min.	
	≥77% of setting	
	41,3 mm	
	474 - 508 Nm	
Seal kit - Cartridge	Buna: 990-019-007	
Seal kit - Cartridge	Polyurethane: 990-019-002	
Seal kit - Cartridge	Viton: 990-019-006	

CONFIGURATION. SEE  
CONFIGURATION SECTION.

# OPTION SELECTION EXAMPLE: MBIGXLN

	(L)	(N)	MATERIAL/COATING	(/LH)
L 4000 psi (280 bar)	N	/LH	-	
K 3000 psi (210 bar)	V	/AP		
M 5000 psi (350 bar)			Standard Material/Coating	

## TECHNICAL FEATURES

- K 2300psi 154bar K 3350psi 210bar
- L 3075psi 215bar L 4350psi 300bar
- K 3850psi 270bar M 5350psi 370bar
- 
- 
- ±50psi 3.5bar ±350psi(20bar)
- /AP /LH
- 
- 2 , 1+ x
- 3
- 
- 3
- 
- Sun
- 
- 
- Sun

## PERFORMANCE CURVES

