


4-Port Vented, Non-adjustable

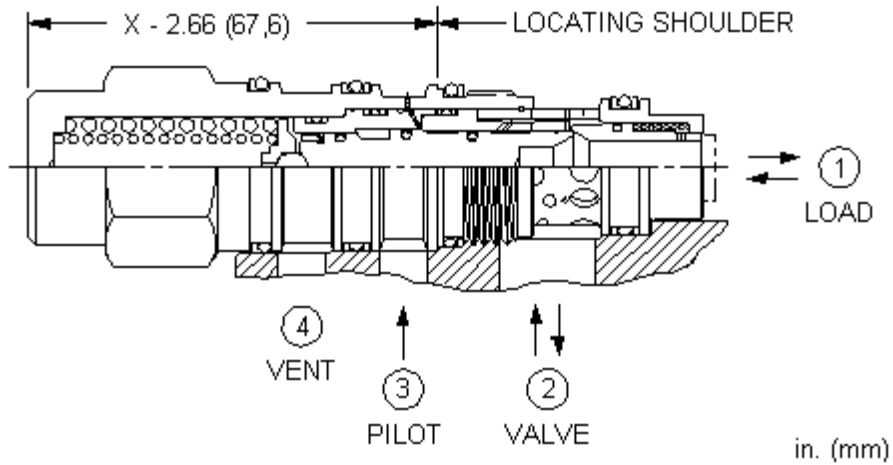

**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Maximum Operating Pressure	350 bar
Pilot Ratio	3:1
Maximum Recommended Load Pressure	See Technical Features
Check Cracking Pressure	1,7 bar
Factory Pressure Settings Established at	30 cc/min.
Maximum Valve Leakage at Reseat	0,3 cc/min.
Reseat	≥77% of setting
Seal kit - Cartridge	Buna: 990-022-007
Seal kit - Cartridge	Polyurethane: 990-022-002
Seal kit - Cartridge	Viton: 990-022-006
Seal kit - Cartridge	Buna: 990-022-007
Seal kit - Cartridge	Polyurethane: 990-022-002
Seal kit - Cartridge	Viton: 990-022-006

**CONFIGURATION OPTIONS**

**Model Code Example: MWEAXLN**

**FACTORY SET**

(L)

**SEAL MATERIAL**

(N)

**MATERIAL/COATING**

- L** 4000 psi (280 bar)
- K** 3000 psi (210 bar)
- M** 5000 psi (350 bar)

- N** Buna-N
- V** Viton

- Standard Material/Coating**
- JAP** Stainless Steel, Passivated