


4-Port Vented, Non-adjustable

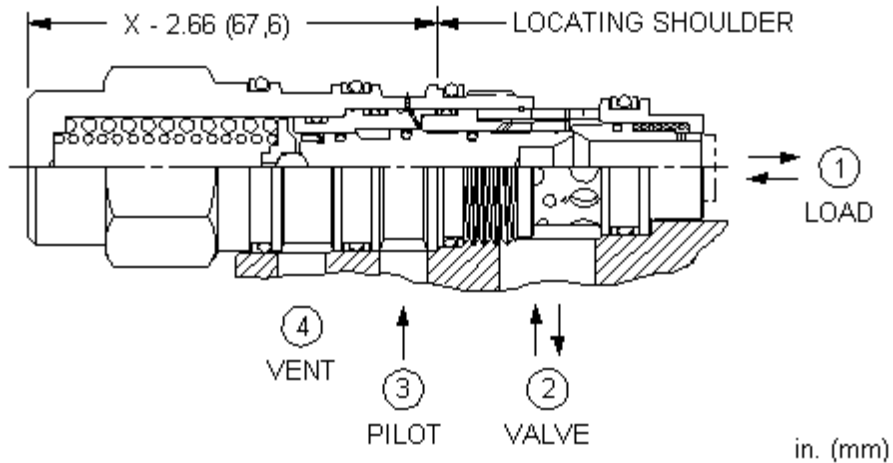

in. (mm)

2 1

**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-22A
	2
	120 L/min.
	350 bar
	4.5:1
	See Technical Features
	1,7 bar
	0,3 cc/min.
	30 cc/min.
	≥77% of setting
	28,6 mm
	61 - 68 Nm
Seal kit - Cartridge	Buna: 990-022-007
Seal kit - Cartridge	Polyurethane: 990-022-002
Seal kit - Cartridge	Viton: 990-022-006
Seal kit - Cartridge	Buna: 990-022-007
Seal kit - Cartridge	Polyurethane: 990-022-002
Seal kit - Cartridge	Viton: 990-022-006

# OPTION SELECTION EXAMPLE: MWEGLN

(L)

(N)

**L** 4000 psi (280 bar)

**N**

K 3000 psi (210 bar)

V

M 5000 psi (350 bar)

## TECHNICAL FEATURES

- K 2300psi 154bar K 3350psi 210bar
- L 3075psi 215bar L 4350psi 300bar
- K 3850psi 270bar M 5350psi 370bar
- 
- ±50psi 3.5bar ±350psi(20bar)
- 
- 4
- 
- 
- Sun
- 
- 
- Sun

## PERFORMANCE CURVES

