


4-Port Vented

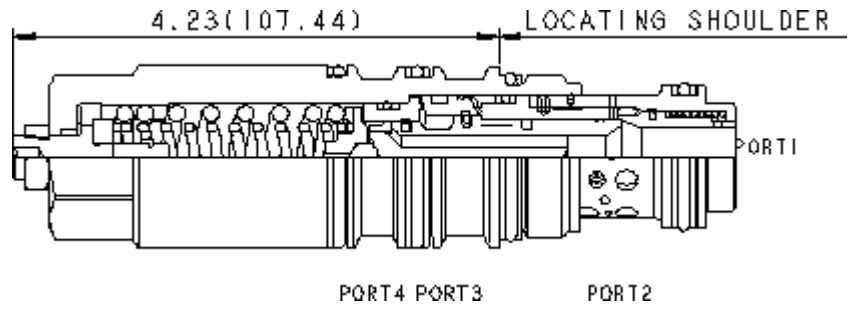

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Seal kit - Cartridge	Buna: 990-023-007
Seal kit - Cartridge	Polyurethane: 990-023-002
Seal kit - Cartridge	Viton: 990-023-006

CONFIGURATION OPTIONS

Model Code Example: MWGALHN

CONTROL	(L)	FUNCTIONAL SETTING RANGE	(H)	SEAL MATERIAL	(N)	MATERIAL/COATING
L	Standard Screw Adjustment	H	1000 - 4000 psi (70 - 280 bar), 3000 psi (210 bar) Standard Setting	N	Buna-N	Standard Material/Coating
		J	2000 - 5000 psi (140 - 350 bar), 3000 psi (210 bar) Standard Setting	V	Viton	/AP Stainless Steel, Passivated