
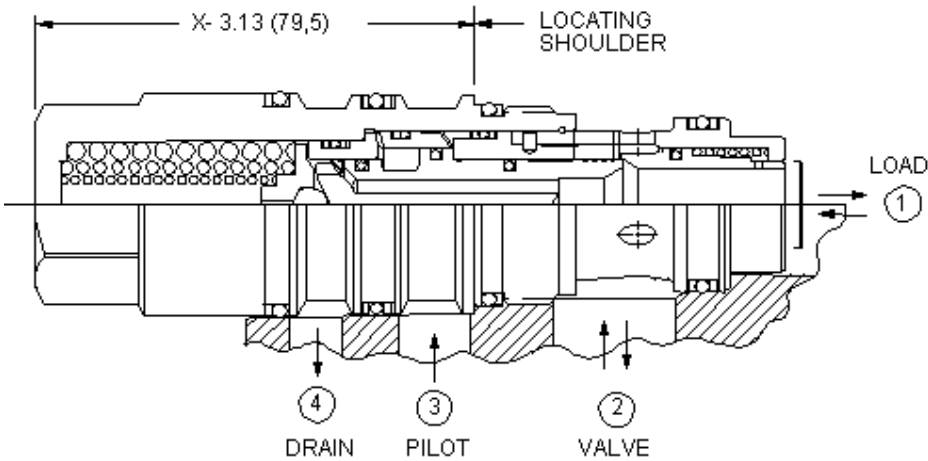




in. (mm)

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	T-23A
Series	3
Capacity	240 L/min.
Maximum Operating Pressure	350 bar
Check Cracking Pressure	1,7 bar
Maximum Valve Leakage at Reseat	See Technical Features
Valve Hex Size	31,8 mm
Valve Installation Torque	203 - 217 Nm
Seal kit - Cartridge	Buna: 990-023-007
Seal kit - Cartridge	Polyurethane: 990-023-002
Seal kit - Cartridge	Viton: 990-023-006
Seal kit - Cartridge	Buna: 990-023-007
Seal kit - Cartridge	Polyurethane: 990-023-002
Seal kit - Cartridge	Viton: 990-023-006

OPTION SELECTION EXAMPLE: MWGMXGIN

CONTROL	(X)	MINIMUM CONTROL PRESSURE	(I)	SEAL MATERIAL	(N)	MATERIAL/COATING
X	Not Adjustable	I	300 psi (20 bar)	N	Buna-N	Standard Material/Coating
		G	150 psi (10,5 bar)	V	Viton	/AP Stainless Steel, Passivated
		K	450 psi (33 bar)			/LH Mild Steel, Zinc-Nickel
		M	525 psi (36,7 bar)			

PERFORMANCE CURVES

