


4-Port Vented, Non-adjustable

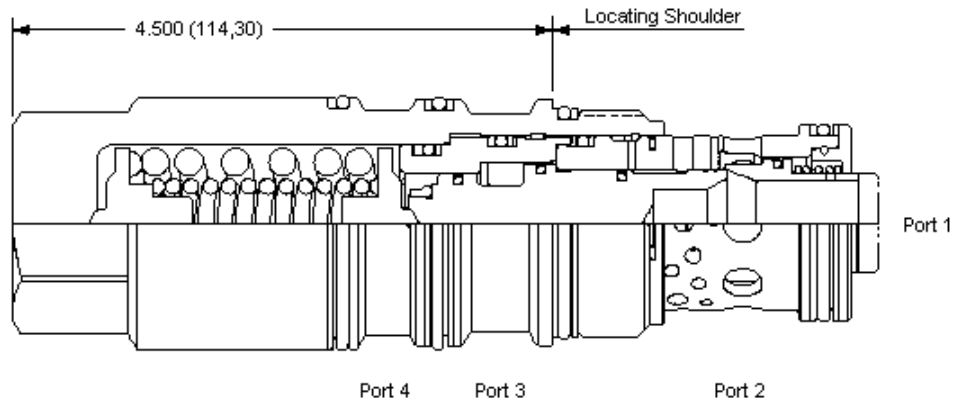

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Maximum Operating Pressure	350 bar
Pilot Ratio	4.5:1
Maximum Recommended Load Pressure	See Technical Features
Check Cracking Pressure	1,7 bar
Factory Pressure Settings Established at	30 cc/min.
Maximum Valve Leakage at Reseat	0,3 cc/min.
Reseat	≥77% of setting
Seal kit - Cartridge	Buna: 990-024-007
Seal kit - Cartridge	Polyurethane: 990-024-002
Seal kit - Cartridge	Viton: 990-024-006
Seal kit - Cartridge	Buna: 990-024-007
Seal kit - Cartridge	Polyurethane: 990-024-002
Seal kit - Cartridge	Viton: 990-024-006

CONFIGURATION OPTIONS

Model Code Example: **MWIGXLN**

FACTORY SET

- L** 4000 psi (280 bar)
- K** 3000 psi (210 bar)
- M** 5000 psi (350 bar)

(L)

SEAL MATERIAL

- N** Buna-N
- V** Viton

(N)

MATERIAL/COATING

- Standard Material/Coating**
- /JAP** Stainless Steel, Passivated
- /LH** Mild Steel, Zinc-Nickel