


4-Port Vented, Non-adjustable

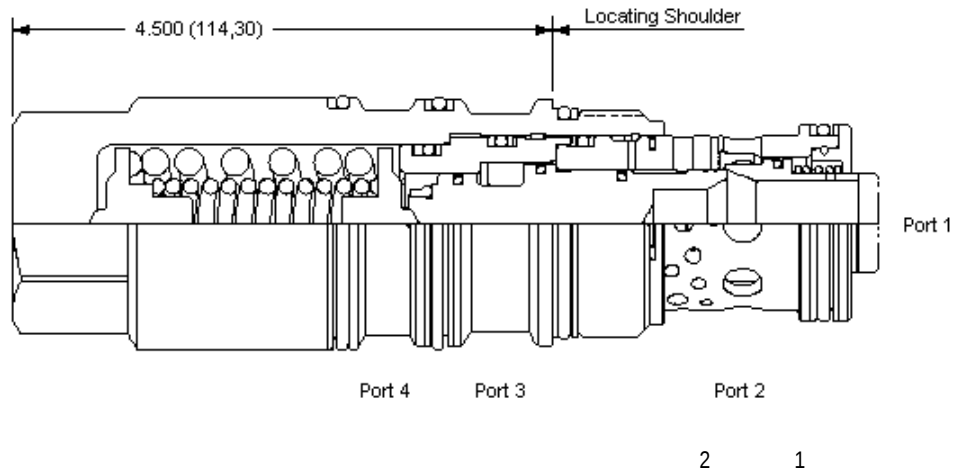

**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-24A
	4
	480 L/min.
	350 bar
	4.5:1
	See Technical Features
	1,7 bar
	0,3 cc/min.
	30 cc/min.
	≥77% of setting
	41,3 mm
	474 - 508 Nm
Seal kit - Cartridge	Buna: 990-024-007
Seal kit - Cartridge	Polyurethane: 990-024-002
Seal kit - Cartridge	Viton: 990-024-006
Seal kit - Cartridge	Buna: 990-024-007
Seal kit - Cartridge	Polyurethane: 990-024-002
Seal kit - Cartridge	Viton: 990-024-006

# OPTION SELECTION EXAMPLE: MWIGXLN

	(L)	(N)	MATERIAL/COATING
<b>L</b> 4000 psi (280 bar)	<b>N</b>	Standard Material/Coating	
K 3000 psi (210 bar)	V	/AP	
M 5000 psi (350 bar)		/LH	-

## TECHNICAL FEATURES

- K 2300psi 154bar K 3350psi 210bar
- L 3075psi 215bar L 4350psi 300bar
- K 3850psi 270bar M 5350psi 370bar
- 
- 
- ±50psi 3.5bar ±350psi(20bar)
- /AP /LH
- 
- 4
- 4
- 
- 
- Sun
- 
- 
- Sun

## PERFORMANCE CURVES

