


CONFIGURATION

L	
E	75 psi (5 bar)
N	
Material/Coating	

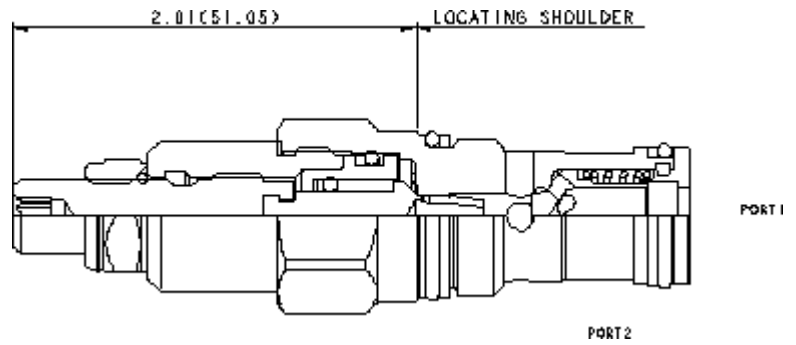

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-13A
	1
	28 L/min. (4,8 mm)
	350 bar
110 SUS (24 cSt)	0,7 cc/min.
-	5
	22,2 mm
	41 - 47 Nm
	4 mm
	15 mm
	9 - 10 Nm
	0.14 kg.
Seal kit - Cartridge	Buna: 990-010-007
Seal kit - Cartridge	EPDM: 990-010-014
Seal kit - Cartridge	Polyurethane: 990-010-002
Seal kit - Cartridge	Viton: 990-010-006
Seal kit - Cartridge	Buna: 990-010-007
Seal kit - Cartridge	EPDM: 990-010-014
Seal kit - Cartridge	Polyurethane: 990-010-002
Seal kit - Cartridge	Viton: 990-010-006

: • O 1 0.75 in. (19 mm)

OPTION SELECTION EXAMPLE: NCCBLEN

	(L)	(E)	(N)	(MATERIAL/COATING)	(/LH)
L	E 75 psi (5 bar)	N	/LH	-	
H	A 4 psi (0,3 bar)	E EPDM	/AP		
	B 15 psi (1 bar)	V	Standard Material/Coating		
	C 30 psi (2 bar)				
	D 50 psi (3,5 bar)				

TECHNICAL FEATURES

- 2
- 1 2
- EPDM

PERFORMANCE CURVES

