


**CONFIGURATION**

L	
C	30 psi (2 bar)
N	
Material/Coating	

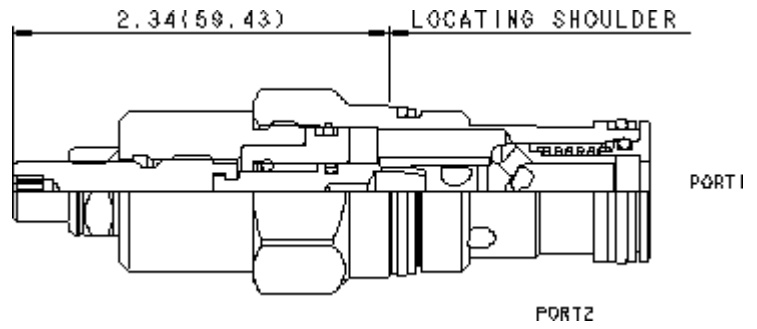

**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-5A
	2
	45 L/min. (6,4 mm)
	350 bar
110 SUS (24 cSt)	0,7 cc/min.
-	5
	28,6 mm
	61 - 68 Nm
	4 mm
	15 mm
	9 - 10 Nm
	0.27 kg.
Seal kit - Cartridge	Buna: 990-203-007
Seal kit - Cartridge	EPDM: 990-203-014
Seal kit - Cartridge	Viton: 990-203-006
Seal kit - Cartridge	Buna: 990-203-007
Seal kit - Cartridge	EPDM: 990-203-014
Seal kit - Cartridge	Viton: 990-203-006

: • O 1 0.75 in. (19 mm)

## OPTION SELECTION EXAMPLE: NCEBLCN

	(L)	(C)	(N)	MATERIAL/COATING	(/LH)
<b>L</b>	<b>C</b> 30 psi (2 bar)	<b>N</b>	<b>/LH</b>	-	
H	A 4 psi (0,3 bar)	E EPDM	/AP		
O	B 15 psi (1 bar)	V		Standard Material/Coating	
	D 50 psi (3,5 bar)				
	E 75 psi (5 bar)				

### TECHNICAL FEATURES

- 2
- 1 2
- 
- 
- EPDM
- Sun

### PERFORMANCE CURVES

