

**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	T-2A
Series	2
Capacity	80 L/min.
Maximum Operating Pressure	140 bar
Pilot Ratio	20:1
Control Pilot Flow	0,16 - 0,25 L/min.
Maximum Air Pressure	10,5 bar
Valve Hex Size	28,6 mm
Valve Installation Torque	61 - 68 Nm
Adjustment Screw Internal Hex Size	4 mm
Locknut Hex Size	15 mm
Locknut Torque	9 - 10 Nm
Model Weight	0,27 kg.
Seal kit - Cartridge	Buna: 990-202-007
Seal kit - Cartridge	Polyurethane: 990-002-002
Seal kit - Cartridge	Viton: 990-202-006
Seal kit - Cartridge	Buna: 990-202-007
Seal kit - Cartridge	Polyurethane: 990-002-002
Seal kit - Cartridge	Viton: 990-202-006

# OPTION SELECTION EXAMPLE: PBFCABN

CONTROL

(A) OPERATING RANGE

(B) SEAL MATERIAL

(N)

**A** External 1/4 NPTF Port


**B** 50 - 1500 psi (3,5 - 105 bar)

**N** Buna-N


V Viton

## PERFORMANCE CURVES


**No Load Pressure Drop with Valve Full Open**

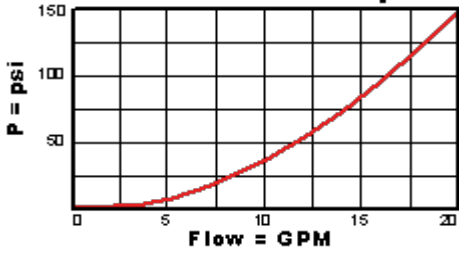

**No Load Pressure Drop with Valve Full Open**

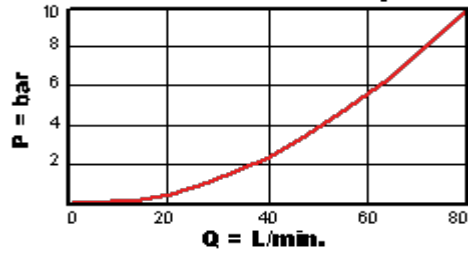

**Regulated Pressure**

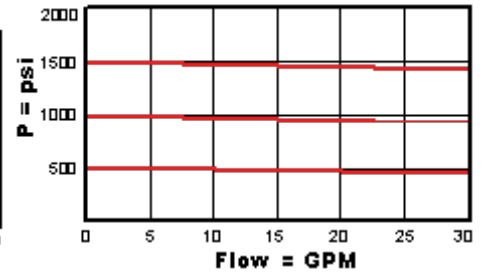

**Regulated Pressure**

