

Port 1  
Reduced Pressure

Port 3  
Drain

Port 2  
Inlet

**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	T-17A
Series	3
Capacity	160 L/min.
Maximum Operating Pressure	350 bar
Control Pilot Flow	0,25 - 0,33 L/min.
Factory Pressure Settings Established at	blocked control port (dead headed)
Pilot Control Cavity	T-8A
Valve Hex Size	31,8 mm
Valve Installation Torque	203 - 217 Nm
Model Weight	0.46 kg.
Seal kit - Cartridge	Buna: 990-017-007
Seal kit - Cartridge	EPDM: 990-017-014
Seal kit - Cartridge	Polyurethane: 990-017-002
Seal kit - Cartridge	Viton: 990-017-006

# OPTION SELECTION EXAMPLE: PBHB8WN

MINIMUM CONTROL PRESSURE

(W) SEAL MATERIAL


(N)

W 100 psi (7 bar)  
 D 25 psi (1,7 bar)


N Buna-N  
 E EPDM  
 V Viton

## PERFORMANCE CURVES


**No Load Pressure Drop with Valve Full Open**

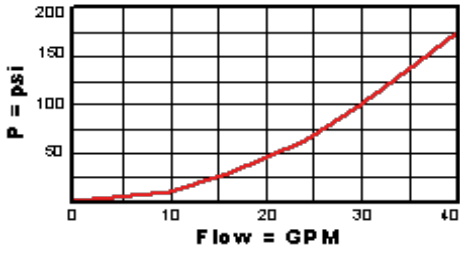

**No Load Pressure Drop with Valve Full Open**

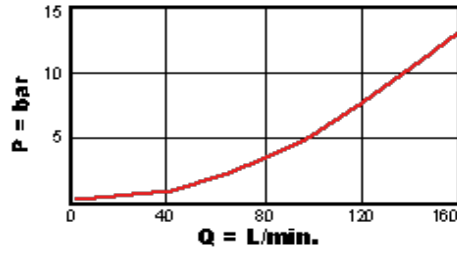

**Regulated Pressure**

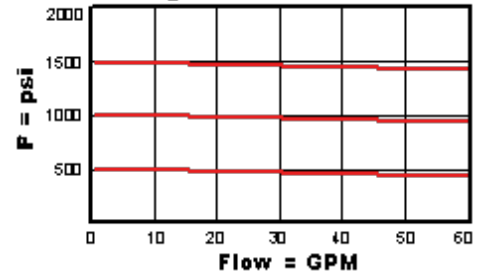

**Regulated Pressure**

