

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	T-19A
Series	4
Capacity	320 L/min.
Maximum Operating Pressure	350 bar
Control Pilot Flow	0,25 - 0,33 L/min.
Factory Pressure Settings Established at	blocked control port (dead headed)
Pilot Control Cavity	T-8A
Valve Hex Size	41,3 mm
Valve Installation Torque	474 - 508 Nm
Model Weight	1.05 kg.
Seal kit - Cartridge	Buna: 990-019-007
Seal kit - Cartridge	EPDM: 990-019-014
Seal kit - Cartridge	Polyurethane: 990-019-002
Seal kit - Cartridge	Viton: 990-019-006

OPTION SELECTION EXAMPLE: PJB8WN

MINIMUM CONTROL PRESSURE

(W)

SEAL MATERIAL

(N)

W 100 psi (7 bar)

N Buna-N


D 25 psi (1,7 bar)

E EPDM


V Viton

PERFORMANCE CURVES


No Load Pressure Drop with Valve Full Open

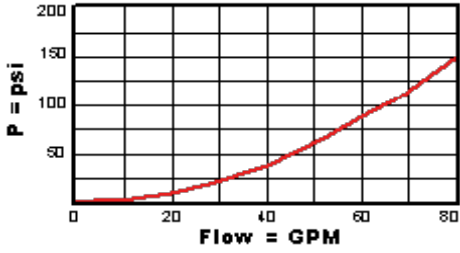

No Load Pressure Drop with Valve Full Open

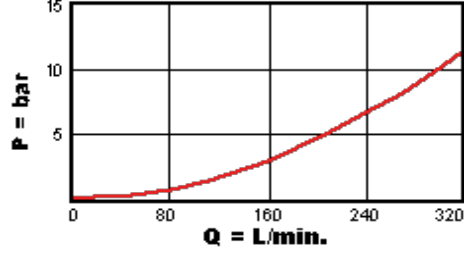

Regulated Pressure

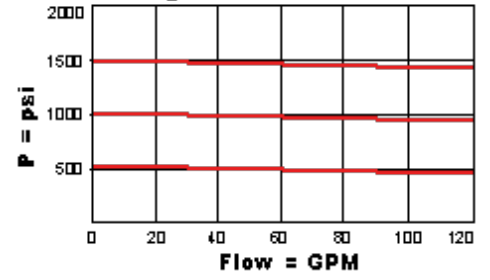

Regulated Pressure

