

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	T-19A
Series	4
Capacity	320 L/min.
Maximum Operating Pressure	140 bar
Pilot Ratio	20:1
Control Pilot Flow	0,25 - 0,33 L/min.
Maximum Air Pressure	10,5 bar
Valve Hex Size	41,3 mm
Valve Installation Torque	474 - 508 Nm
Locknut Hex Size	15 mm
Locknut Torque	9 - 10 Nm
Model Weight	1,30 kg
Seal kit - Cartridge	Buna: 990-019-007
Seal kit - Cartridge	Polyurethane: 990-019-002
Seal kit - Cartridge	Viton: 990-019-006

OPTION SELECTION EXAMPLE: PBJCBN

CONTROL

(B) SEAL MATERIAL

(N)


B External 4-SAE Port

N Buna-N


V Viton

PERFORMANCE CURVES


No Load Pressure Drop with Valve Full Open

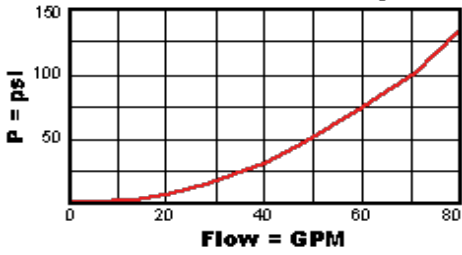

No Load Pressure Drop with Valve Full Open

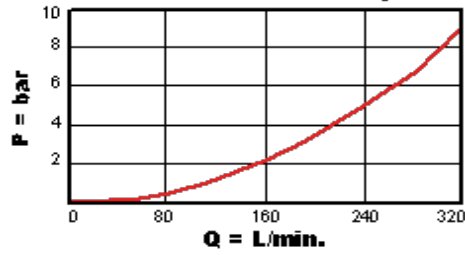

Regulated Pressure

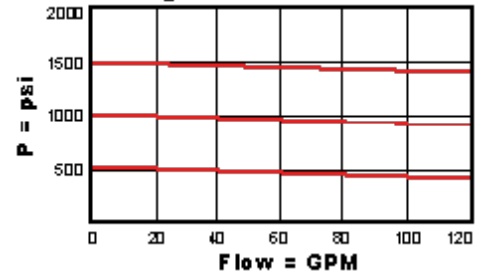

Regulated Pressure

