

CONFIGURATION

B 4-SAE

2 1

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-19A
	4
	320 L/min.
	140 bar
	20:1
	0,25 - 0,33 L/min.
	10,5 bar
	41,3 mm
	474 - 508 Nm
	15 mm
	9 - 10 Nm
	1,30 kg
Seal kit - Cartridge	Buna: 990-019-007
Seal kit - Cartridge	Polyurethane: 990-019-002
Seal kit - Cartridge	Viton: 990-019-006

OPTION SELECTION EXAMPLE: PBJCBN

(B)

(B)

(V)

B 4-**SAE**

B 50 - 1500 psi (3,5 - 105 bar)

V


N

TECHNICAL FEATURES


- 3 /
- 1 2
- 3 1000 psi (70 bar)
- 50 1500 psi (3,5 105 bar)
- 150 psi (10,5 bar)
- 3000 psi (210 bar)
- /
-
- Sun /

PERFORMANCE CURVES


No Load Pressure Drop with Valve Full Open

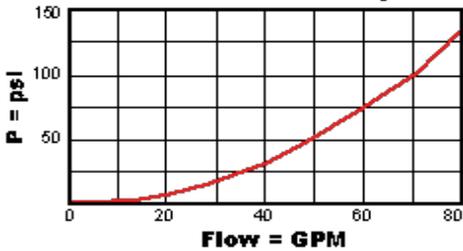

No Load Pressure Drop with Valve Full Open

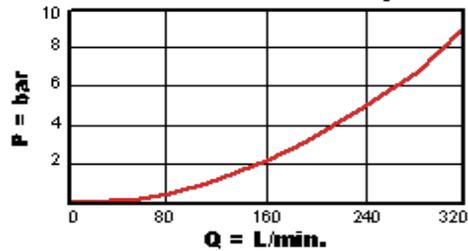

Regulated Pressure

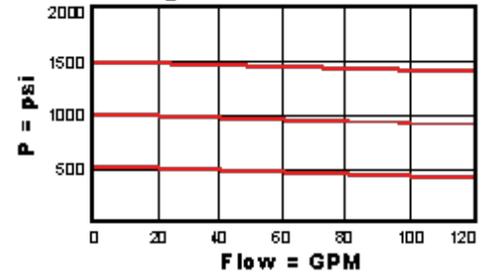

Regulated Pressure

