

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	T-17A
Series	3
Capacity	160 L/min.
Maximum Operating Pressure	140 bar
Pilot Ratio	20:1
Control Pilot Flow	0,25 - 0,33 L/min.
Maximum Air Pressure	10,5 bar
Valve Hex Size	31,8 mm
Valve Installation Torque	203 - 217 Nm
Adjustment Screw Internal Hex Size	4 mm
Locknut Hex Size	15 mm
Locknut Torque	9 - 10 Nm
Model Weight	0,60 kg
Seal kit - Cartridge	Buna: 990-017-007
Seal kit - Cartridge	Polyurethane: 990-017-002
Seal kit - Cartridge	Viton: 990-017-006
Seal kit - Cartridge	Buna: 990-017-007
Seal kit - Cartridge	Polyurethane: 990-017-002
Seal kit - Cartridge	Viton: 990-017-006

OPTION SELECTION EXAMPLE: PPHCBBN

CONTROL

(B) OPERATING RANGE

(B) SEAL MATERIAL

(N)

B External 4-SAE Port


B 50 - 1500 psi (3,5 - 105 bar)

N Buna-N


V Viton

PERFORMANCE CURVES


No Load Pressure Drop with Valve Full Open

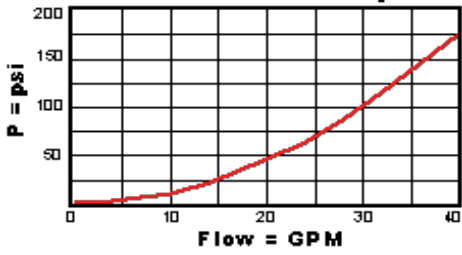

No Load Pressure Drop with Valve Full Open

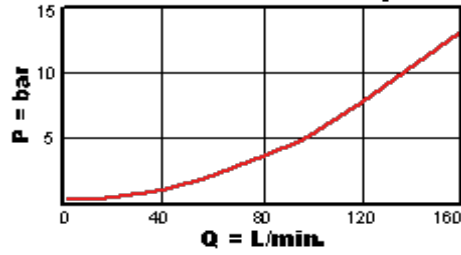

Regulated Pressure

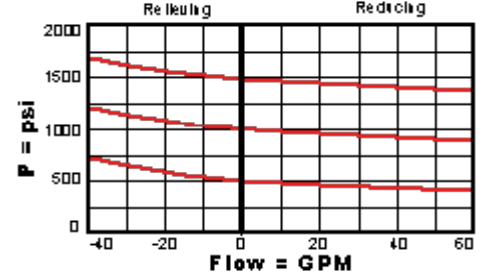

Regulated Pressure

