

**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	T-17A
Series	3
Capacity	160 L/min.
Maximum Operating Pressure	140 bar
Pilot Ratio	20:1
Control Pilot Flow	0,25 - 0,33 L/min.
Maximum Air Pressure	10,5 bar
Valve Hex Size	31,8 mm
Valve Installation Torque	203 - 217 Nm
Adjustment Screw Internal Hex Size	4 mm
Locknut Hex Size	15 mm
Locknut Torque	9 - 10 Nm
Model Weight	0,60 kg
Seal kit - Cartridge	Buna: 990-017-007
Seal kit - Cartridge	Polyurethane: 990-017-002
Seal kit - Cartridge	Viton: 990-017-006

# OPTION SELECTION EXAMPLE: PPHCBN

CONTROL

(B) SEAL MATERIAL

(N)


**B** External 4-SAE Port

**N** Buna-N


V Viton

## PERFORMANCE CURVES


**No Load Pressure Drop with Valve Full Open**

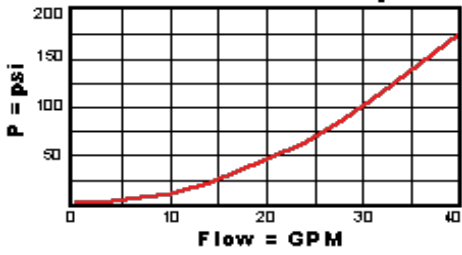

**No Load Pressure Drop with Valve Full Open**

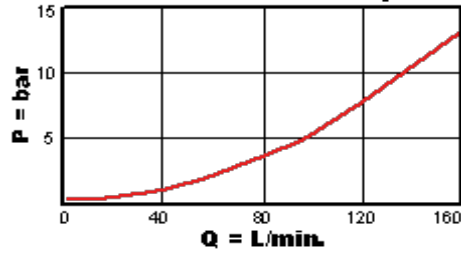

**Regulated Pressure**

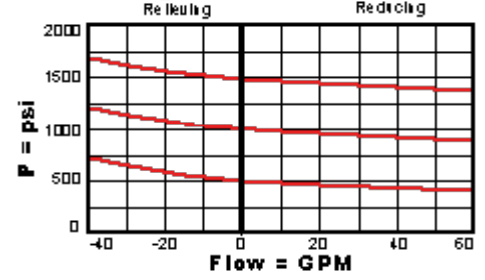

**Regulated Pressure**

