
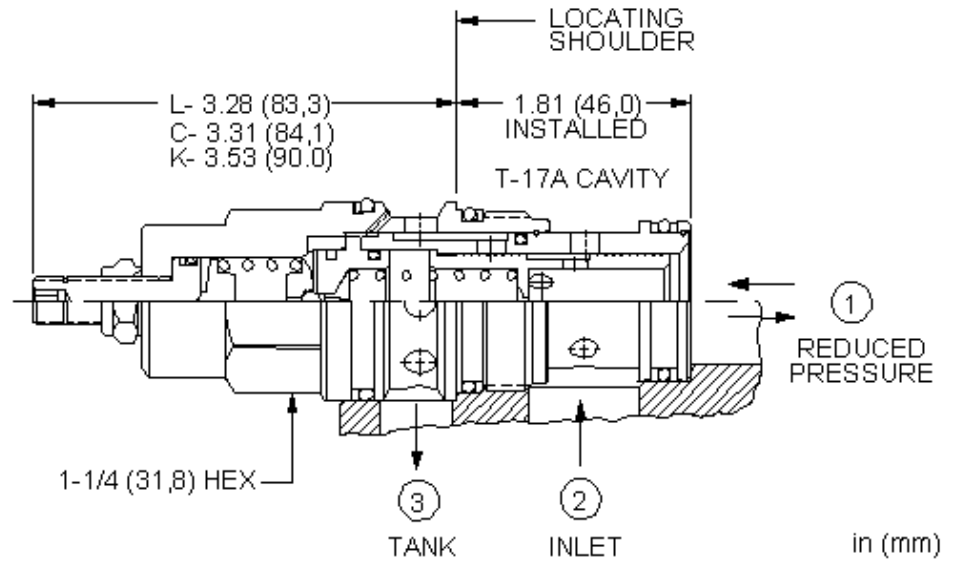




Pilot-operated, pressure reducing/relieving valves reduce a high primary pressure at the inlet (port 2) to a constant reduced pressure at port 1, with a full-flow relief function from port 1 to tank (port 3).

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Maximum Operating Pressure	5000 psi
Control Pilot Flow	15 - 20 in ³ /min.
Factory Pressure Settings Established at	blocked control port (dead headed)
Adjustment - No. of CW Turns from Min. to Max. setting	5
Locknut Hex Size	9/16 in.
Locknut Torque	80 - 90 lbf in.
Seal kit - Cartridge	Buna: 990-017-007
Seal kit - Cartridge	Polyurethane: 990-017-002
Seal kit - Cartridge	Viton: 990-017-006

CONFIGURATION OPTIONS		Model Code Example: PPHFLANN	
CONTROL	(L)	(N)	SEAL MATERIAL RANGE
L	Standard Screw Adjustment	N	Buna-N
C	Tamper Resistant - Factory Set	A	Viton
K	Handknob	B	
		C	
		D	
		E	
		Q	
		W	