


**CONFIGURATION**

L	
D	50 - 485 psi (3,5 - 33,5 bar)
N	

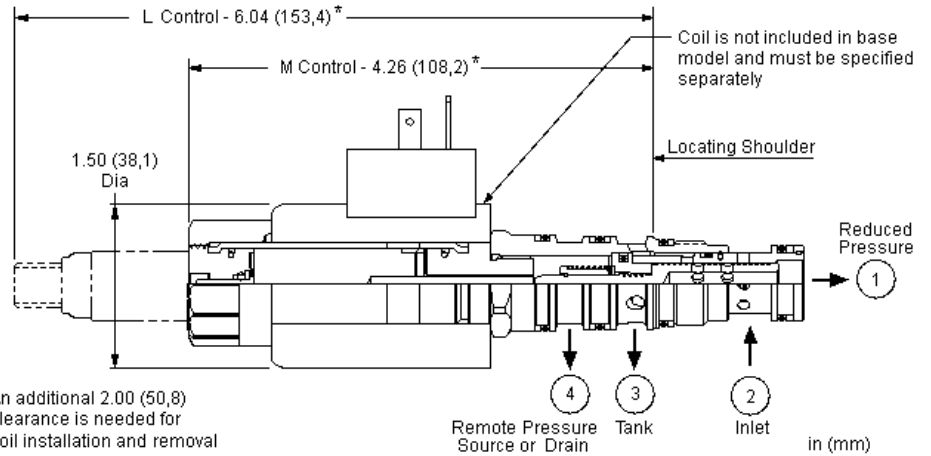

**PROPORTIONAL PERFORMANCE DATA**

	6%
	<8%
	<2%
( )	<2%
	140 Hz
Seal kit - Cartridge	Buna: 990-021-007
Seal kit - Cartridge	Polyurethane: 990-021-002
Seal kit - Cartridge	Viton: 990-021-006

**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-21A
	1
	20 L/min.
	350 bar
110 SUS (24 cSt)	41 cc/min.
	210 bar
	5
	19 mm
	22,2 mm
	41 - 47 Nm
	4 mm
	15 mm
	9 - 10 Nm
	0,55 kg
Seal and nut kit - Coil	Viton: 990-770-006
Seal kit - Cartridge	Buna: 990-021-007
Seal kit - Cartridge	Polyurethane: 990-021-002
Seal kit - Cartridge	Viton: 990-021-006



# OPTION SELECTION EXAMPLE: PSDPLDN

	(L)	(D)	(N)	(212)
<b>L</b>		<b>D</b> 50 - 485 psi (3,5 - 33,5 bar)	<b>N</b>	<b>212</b> DIN 43650 A 12 VDC
<b>M</b> ( )		<b>B</b> 100 - 1125 psi (7 - 77,5 bar)	<b>V</b>	
		<b>E</b> 25 - 250 psi (1,7 - 18 bar)		
				<b>224</b> DIN 43650 A 24 VDC
				<b>224NX01</b> DIN 43650 A 24 VDC (TVS) XMD-01
				<b>224NX02</b> DIN 43650 A 24 VDC (TVS) XMD-02
				<b>912</b> Deutsch DT04-2P 12 VDC
				<b>912NX01</b> Deutsch DT04-2P 12 VDC (TVS) XMD-01
				<b>912NX02</b> Deutsch DT04-2P 12 VDC (TVS) XMD-02
				<b>924</b> Deutsch DT04-2P 24 VDC
				<b>924NX01</b> Deutsch DT04-2P 24 VDC (TVS) XMD-01
				<b>924NX02</b> Deutsch DT04-2P 24 VDC (TVS) XMD-02

## TECHNICAL FEATURES

- 3 3000 psi (210 bar)
- 5000 psi (350 bar)
- 
- 
- 3 2000 psi (140 bar)
- 
- 5%
- 100-250 HZ
- 1 2
- "L K"
- "L K"
- 4
- 4 1:1 3000 psi 210 bar
- Sun /

## PERFORMANCE CURVES

