

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-22A
	2
	80 L/min.
	350 bar
	blocked control port (dead headed)
	0,16 - 0,25 L/min.
	5
	28,6 mm
	61 - 68 Nm
	4 mm
	15 mm
	9 - 10 Nm
	0,30 kg
Seal kit - Cartridge	Buna: 990-022-007
Seal kit - Cartridge	Polyurethane: 990-022-002
Seal kit - Cartridge	Viton: 990-022-006
Seal kit - Cartridge	Buna: 990-022-007
Seal kit - Cartridge	Polyurethane: 990-022-002
Seal kit - Cartridge	Viton: 990-022-006

: • : A B 3000 psi (210 bar) D E 2000 psi (140 bar) W 5000 psi (350 bar)

OPTION SELECTION EXAMPLE: PVFBLN

(L)

(N)

MATERIAL/COATING

L

N

Standard Material/Coating

V


/AP

TECHNICAL FEATURES


- 3 1:1 3000 psi 210 bar
- 1 2
-
- D, E, N Q 2000 psi (140 bar) A, B H 3000 psi (210 bar) C W
- /
- 4
- Sun /

PERFORMANCE CURVES


No Load Pressure Drop with Valve Full Open

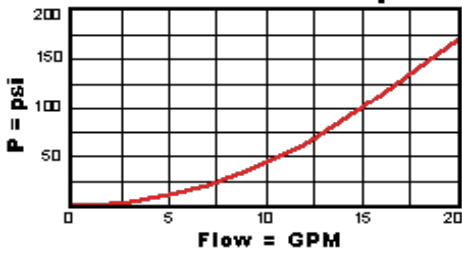

No Load Pressure Drop with Valve Full Open

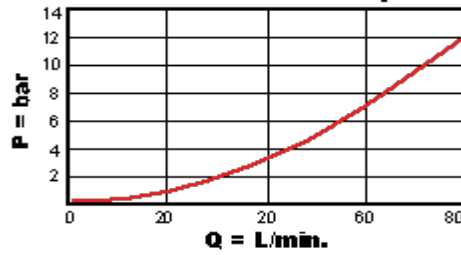

Regulated Pressure
Relieving Reducing

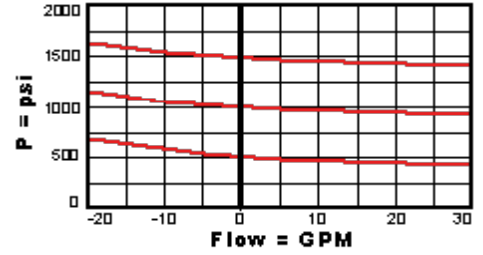

Regulated Pressure
Relieving Reducing

