
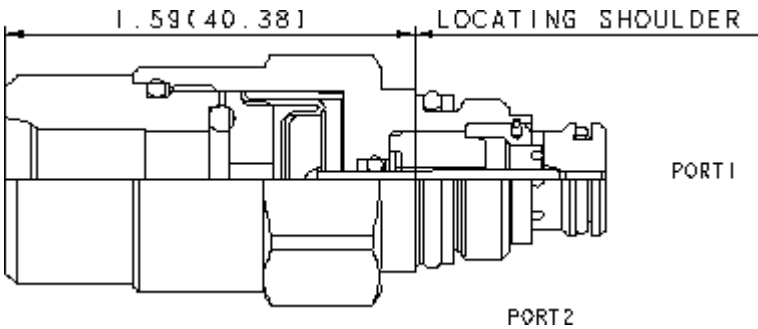




2

1

1 2

T-8A

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-8A
	P
	10 L/min.
	350 bar
110 SUS (24 cSt)	1 cc/min.
	See Control Options
	10,5 bar
	27 - 33 Nm
Seal kit - Cartridge	Buna: 990-608-007
Seal kit - Cartridge	EPDM: 990-608-014
Seal kit - Cartridge	Polyurethane: 990-008-002
Seal kit - Cartridge	Viton: 990-608-006
Seal kit - Cartridge	Buna: 990-608-007
Seal kit - Cartridge	EPDM: 990-608-014
Seal kit - Cartridge	Polyurethane: 990-008-002
Seal kit - Cartridge	Viton: 990-608-006


OPTION SELECTION EXAMPLE: RBARBWN

	(B)	(W)	(N)
B	4-SAE	W 50:1	N
A	1/8 NPTF	Y 75:1	E EPDM
D	1/8 BSPP		V

TECHNICAL FEATURES

- Sun T-8A 2 Sun 2 2
- -8 T-8A
-
- 1 2 5000 psi (350 bar)
-
- 50:1 75:1
- 200 psi (14 bar)
- 2 0.43
- Sun /

PERFORMANCE CURVES

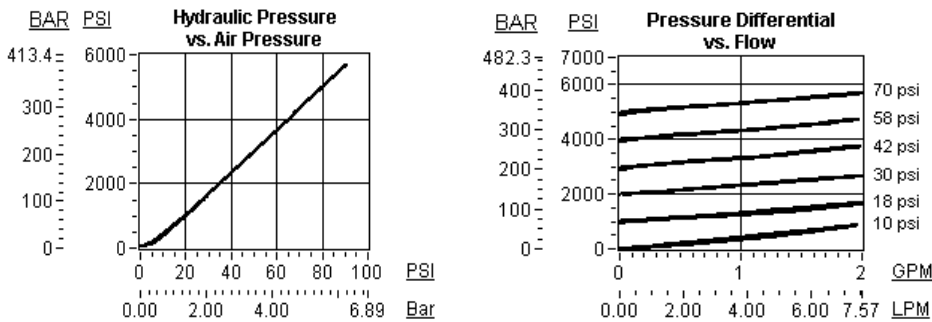

BAR

PSI

482.3

7000

400

6000

300

4000

200

100

0

0

1

2

0.00

2.00

4.00

6.00

7.57

GPM

LPM

Pressure Differential vs. Flow