


**CONFIGURATION**

L	
C	1000 - 6000 psi (70 - 420 bar), 1000 psi (70 bar)
N	
Material/Coating	

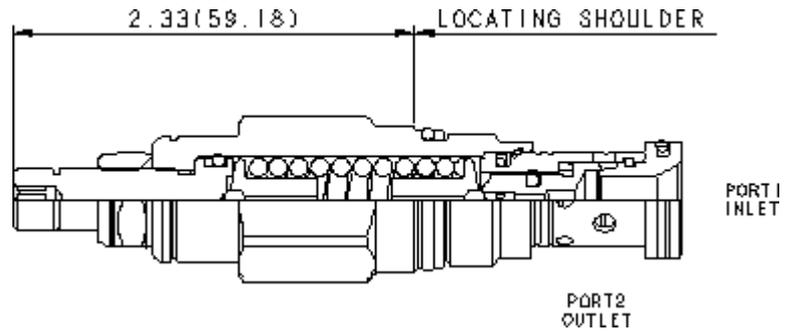

NOTE: DATA MAY VARY BASED ON CONFIGURATION. **TECHNICAL DATA**

	T-10A
	1
	95 L/min.
	350 bar
	0,7 cc/min.
	15 L/min.
	2 ms
	>90% of setting
-	6
	22,2 mm
	41 - 47 Nm
	4 mm
	15 mm
	9 - 10 Nm
	0.17 kg.
Seal kit - Cartridge	Buna: 990-310-007
Seal kit - Cartridge	EPDM: 990-310-014
Seal kit - Cartridge	Viton: 990-310-006
Seal kit - Cartridge	Buna: 990-310-007
Seal kit - Cartridge	EPDM: 990-310-014
Seal kit - Cartridge	Viton: 990-310-006

# OPTION SELECTION EXAMPLE: RDDALCN

	(L)	(C)	(N)	MATERIAL/COATING	(/LH)
<b>L</b>	<b>C</b>	1000 - 6000 psi (70 - 420 bar), 1000 psi (70 bar)	<b>N</b>	/LH -	/AP
		<b>A</b> 500 - 3000 psi (35 - 210 bar), 1000 psi (70 bar)	<b>E</b> EPDM		
		<b>B</b> 300 - 1500 psi (20 - 105 bar), 1000 psi (70 bar)	<b>V</b>		Standard Material/Coating
		<b>D</b> 200 - 800 psi (14 - 55 bar), 400 psi (28 bar)			
		<b>E</b> 100 - 400 psi (7 - 28 bar), 200 psi (14 bar)			
		<b>S</b> 50 - 200 psi (3,5 - 14 bar), 100 psi (7 bar)			
		<b>W</b> 800 - 4500 psi (55 - 315 bar), 1000 psi (70 bar)			

## TECHNICAL FEATURES

- 2
- 2
- 
- 
- 
- 
- 
- 2                    1:1
- EPDM
- Sun                    /
- : A - 2000 psi (138 bar), B - 1000 psi (69 bar), C - 4000 psi (276 bar), D - 800 psi (55 bar), E - 400 psi (28 bar), S - 1000 psi (70 bar), W - 3000 psi (207 bar)
- 90%

## PERFORMANCE CURVES

