


CONFIGURATION

L	
A	500 - 3000 psi (35 - 210 bar), 1000 psi (70 bar)
N	
Material/Coating	

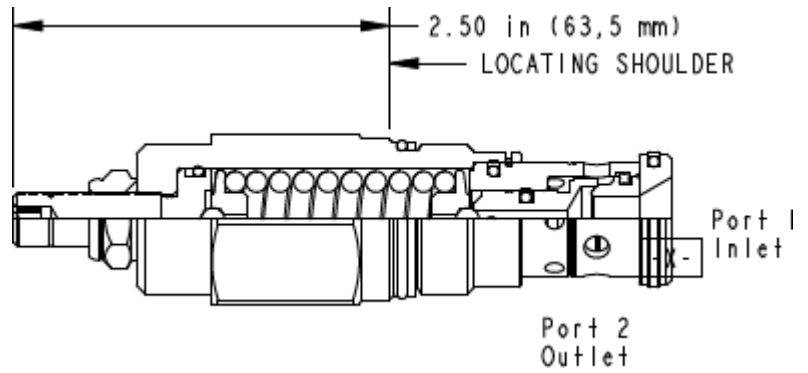

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-3A
	2
	200 L/min.
	350 bar
	0,7 cc/min.
	15 L/min.
	2 ms
	>90% of setting
	6
	28,6 mm
	61 - 68 Nm
	4 mm
	15 mm
	9 - 10 Nm
	0.30 kg.
Seal kit - Cartridge	Buna: 990-303-007
Seal kit - Cartridge	EPDM: 990-303-014
Seal kit - Cartridge	Polyurethane: 990-303-002
Seal kit - Cartridge	Viton: 990-303-006
Seal kit - Cartridge	Buna: 990-303-007
Seal kit - Cartridge	EPDM: 990-303-014
Seal kit - Cartridge	Polyurethane: 990-303-002
Seal kit - Cartridge	Viton: 990-303-006

OPTION SELECTION EXAMPLE: RDFALAN

	(L)	(A)	(N)	MATERIAL/COATING	(/LH)
L	A	500 - 3000 psi (35 - 210 bar), 1000 psi (70 bar)	N	/LH	-
	B	300 - 1500 psi (20 - 105 bar), 1000 psi (70 bar)	E	EPDM	/AP
	C	1000 - 6000 psi (70 - 420 bar), 1000 psi (70 bar)	V	Standard Material/Coating	
	D	200 - 800 psi (14 - 55 bar), 400 psi (28 bar)			
	E	100 - 400 psi (7 - 28 bar), 200 psi (14 bar)			
	S	50 - 200 psi (3,5 - 14 bar), 100 psi (7 bar)			
	W	800 - 4500 psi (55 - 315 bar), 1000 psi (70 bar)			

TECHNICAL FEATURES

- 2
- 2
-
-
-
-
-
- 2 1:1
- EPDM
- Sun /
- : A - 2000 psi (138 bar), B - 1000 psi (69 bar), C - 4000 psi (276 bar), D - 800 psi (55 bar), E - 400 psi (28 bar), S - 1000 psi (70 bar), W - 3000 psi (207 bar)
- 90%

PERFORMANCE CURVES

