


CONFIGURATION

B Adjustment Range 50 - 1500 psi (3,5 - 105 bar)
Seal Material

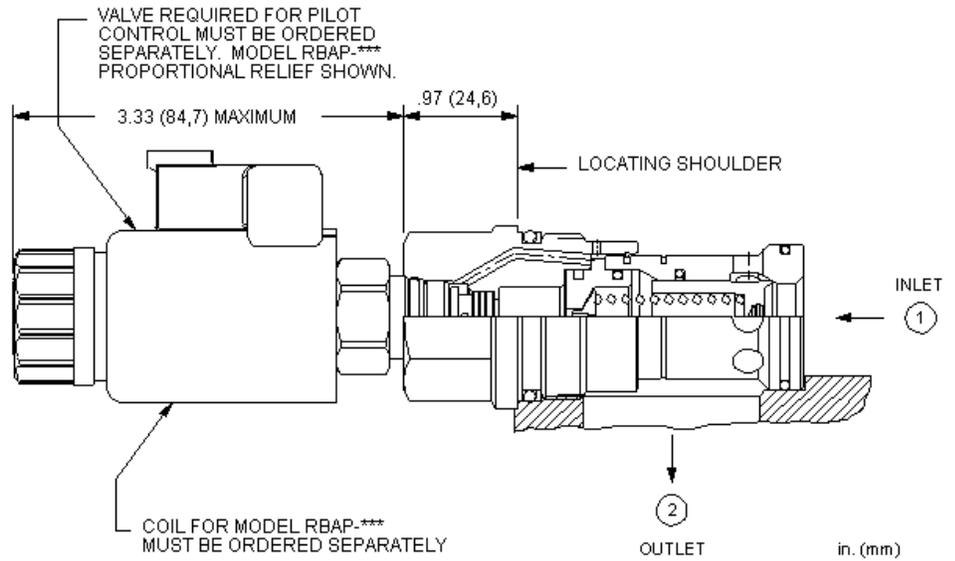

This valve is a normally closed modulating element that incorporates an integral pilot control cavity. It is a balanced poppet design. The pilot control cavity will accept any T-8A pressure control cartridge. When the pressure at the inlet (port 1) reaches the pilot control cartridge's setting, the poppet element starts to open to tank (port 2), throttling flow to regulate the pressure. The pilot cartridge's setting determines the difference in pressure between port 1 and port 2.

TECHNICAL DATA

Maximum Operating Pressure	5000 psi
Control Pilot Flow	15 - 20 in ³ /min.
Main stage leakage at reseal	10 drops/min.
Pilot Control Cavity	T-8A
Response Time - Typical	2 ms
Seal kit - Cartridge	Buna: 990-316-007
Seal kit - Cartridge	EPDM: 990-316-014
Seal kit - Cartridge	Polyurethane: 990-016-002
Seal kit - Cartridge	Viton: 990-316-006

NOTES: • Compound cartridge (pilot and main stage) assembly information is provided for reference only. Cartridges must be ordered separately and assembled at point of use.

CONFIGURATION OPTIONS

Model Code Example: **RPIS8BWN**

ADJUSTMENT RANGE	(B)	SEAL MATERIAL	(N)
B 50 - 1500 psi (3,5 - 105 bar)		N Buna-N	
W 100 - 5000 psi (7 - 350 bar)		E EPDM	
		V Viton	