


CONFIGURATION

L	
A	75 - 3000 psi (5 - 210 bar), 1000 psi (70 bar)
N	

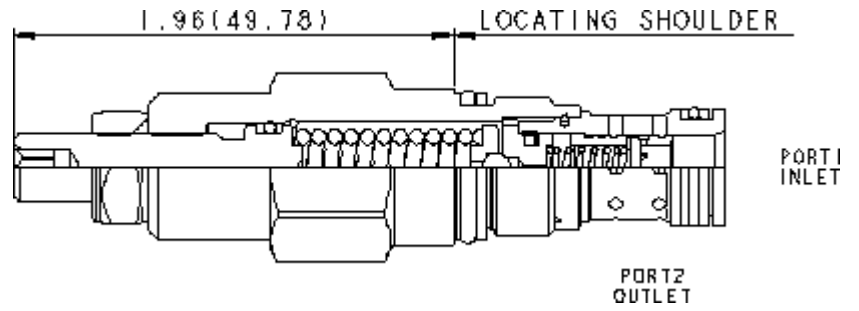

1

NOTE: DATA MAY VARY FROM DIMENSIONS. SEE CONFIGURATION SECTION.

TECHNICAL DATA

	T-162A
	0
	45 L/min.
	350 bar
110 SUS (24 cSt)	30 cc/min.@70 bar
	Kick down point
	25 ms
-	5
	19,1 mm
	27 - 33 Nm
	4 mm
	15 mm
	9 - 10 Nm
	0.10 kg.
Seal kit - Cartridge	Buna: 990-162-007
Seal kit - Cartridge	Polyurethane: 990-162-002
Seal kit - Cartridge	Viton: 990-162-006

OPTION SELECTION EXAMPLE: RQCBLAN

(L)

(A)

(N)

L	A	N
C -	A 75 - 3000 psi (5 - 210 bar), 1000 psi (70 bar)	N
	B 75 - 1500 psi (5 - 105 bar), 1000 psi (70 bar)	V
	C 75 - 6000 psi (5 - 420 bar), 1000 psi (70 bar)	
	N 75 - 800 psi (5 - 55 bar), 400 psi (28 bar)	
	Q 75 - 400 psi (5 - 28 bar), 200 psi (14 bar)	
	W 75 - 4500 psi (5 - 315 bar), 1000 psi (70 bar)	

TECHNICAL FEATURES

- 2
-
- 150
-
-
- 2 1:1
- Sun /

PERFORMANCE CURVES

