
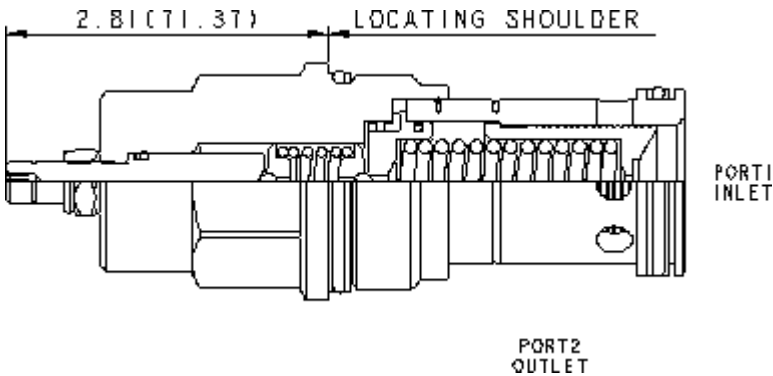




1 1 2 1 2

**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

|                      |                           |
|----------------------|---------------------------|
|                      | T-18A                     |
|                      | 4                         |
|                      | 760 L/min.                |
|                      | 350 bar                   |
| 110 SUS (24 cSt)     | 80 cc/min. @70 bar        |
|                      | Kick down point           |
|                      | 25 ms                     |
| -                    | 5                         |
|                      | 41,3 mm                   |
|                      | 474 - 508 Nm              |
|                      | 4 mm                      |
|                      | 15 mm                     |
|                      | 9 - 10 Nm                 |
|                      | 1.17 kg.                  |
| Seal kit - Cartridge | Buna: 990-018-007         |
| Seal kit - Cartridge | Polyurethane: 990-018-002 |
| Seal kit - Cartridge | Viton: 990-018-006        |
| Seal kit - Cartridge | Buna: 990-018-007         |
| Seal kit - Cartridge | Polyurethane: 990-018-002 |
| Seal kit - Cartridge | Viton: 990-018-006        |

OPTION SELECTION EXAMPLE: RQKBLAN

| (L) | (A)                                                                                                | (N)    | MATERIAL/COATING                 |
|-----|----------------------------------------------------------------------------------------------------|--------|----------------------------------|
| L   | A 100 - 3000 psi (7 - 210 bar), 1000 psi (70 bar)<br>Q 60 - 400 psi (4 - 28 bar), 200 psi (14 bar) | N<br>V | Standard Material/Coating<br>/AP |

TECHNICAL FEATURES

- 2
- 
- 150
- 
- 
- 2 1:1
- /AP
- Sun /

PERFORMANCE CURVES

