

**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	T-11A
Series	1
Capacity	60 L/min.
Maximum Operating Pressure	350 bar
Control Pilot Flow	0,11 - 0,16 L/min.
Main stage leakage at 110 SUS (24 cSt)	30 cc/min.@70 bar
Pilot Control Cavity	T-8A
Response Time - Typical	10 ms
Valve Hex Size	22,2 mm
Valve Installation Torque	41 - 47 Nm
Model Weight	0.10 kg.
Seal kit - Cartridge	Buna: 990-011-007
Seal kit - Cartridge	EPDM: 990-011-014
Seal kit - Cartridge	Polyurethane: 990-011-002
Seal kit - Cartridge	Viton: 990-011-006

# OPTION SELECTION EXAMPLE: RSDC8WN

**MINIMUM CONTROL PRESSURE**


**(W) SEAL MATERIAL**

**(N)**

<b>W</b>	100 psi (7 bar)
<b>D</b>	25 psi (1,7 bar)

<b>N</b>	Buna-N
<b>E</b>	EPDM
<b>V</b>	Viton

## PERFORMANCE CURVES

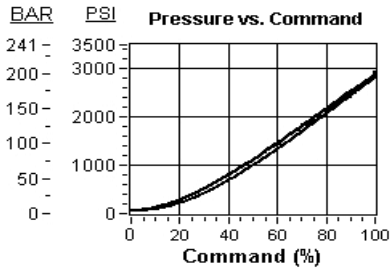

Pilot control provided by Proportional Pilot Relief, Model RBAP-MAN

