

T-8A

1

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

| | |
|----------------------|---------------------------|
| | T-11A |
| | 1 |
| | 60 L/min. |
| | 350 bar |
| | T-8A |
| 110 SUS 24 cSt | 30 cc/min. @70 bar |
| | 0,11 - 0,16 L/min. |
| | 10 ms |
| | 22,2 mm |
| | 41 - 47 Nm |
| | 0.10 kg. |
| Seal kit - Cartridge | Buna: 990-011-007 |
| Seal kit - Cartridge | EPDM: 990-011-014 |
| Seal kit - Cartridge | Polyurethane: 990-011-002 |
| Seal kit - Cartridge | Viton: 990-011-006 |
| Seal kit - Cartridge | Buna: 990-011-007 |
| Seal kit - Cartridge | EPDM: 990-011-014 |
| Seal kit - Cartridge | Polyurethane: 990-011-002 |
| Seal kit - Cartridge | Viton: 990-011-006 |

OPTION SELECTION EXAMPLE: RSDC8WN

(W)

(N)

W 100 psi (7 bar)

N

D 25 psi (1,7 bar)


E EPDM

V

TECHNICAL FEATURES

- 3
- 3 1
- 150
- 3 1:1 3 5000 psi 350 bar
- -8 T-8A
- -8 T-8A
- 2
-
- EPDM
- Sun /

PERFORMANCE CURVES

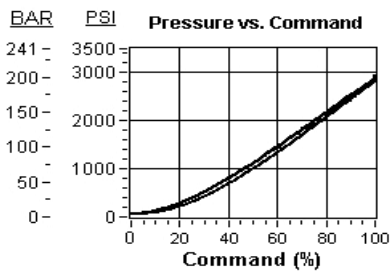

Pilot control provided by Proportional Pilot Relief, Model RBAP-MAN

