

T-8A

1

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-19A
	4
	480 L/min.
	350 bar
	T-8A
110 SUS 24 cSt	80 cc/min.@70 bar
	0,25 - 0,33 L/min.
	10 ms
	41,3 mm
	474 - 508 Nm
	1.19 kg.
Seal kit - Cartridge	Buna: 990-019-007
Seal kit - Cartridge	Polyurethane: 990-019-002
Seal kit - Cartridge	Viton: 990-019-006
Seal kit - Cartridge	Buna: 990-019-007
Seal kit - Cartridge	Polyurethane: 990-019-002
Seal kit - Cartridge	Viton: 990-019-006

OPTION SELECTION EXAMPLE: RSJC8WN

(W)

(N)

W 100 psi (7 bar)

N


D 25 psi (1,7 bar)

V

TECHNICAL FEATURES

- 3
- 3 1
- 150
- 3 1:1 3 5000 psi 350 bar
- -8 T-8A
- -8 T-8A
- 2
-
- Sun /

PERFORMANCE CURVES

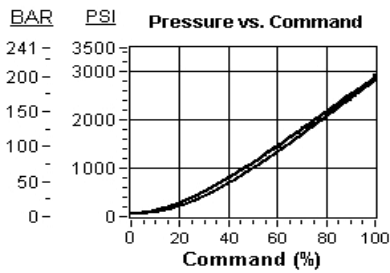

Pilot control provided by Proportional Pilot Relief, Model RBAP-MAN

