

**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	T-21A
Series	1
Capacity	60 L/min.
Maximum Operating Pressure	350 bar
Control Pilot Flow	0,11 - 0,16 L/min.
Main stage leakage at 110 SUS (24 cSt)	30 cc/min.@70 bar
Pilot Control Cavity	T-8A
Response Time - Typical	10 ms
Valve Hex Size	22,2 mm
Valve Installation Torque	41 - 47 Nm
Model Weight	0.13 kg.
Seal kit - Cartridge	Buna: 990-021-007
Seal kit - Cartridge	EPDM: 990-021-014
Seal kit - Cartridge	Polyurethane: 990-021-002
Seal kit - Cartridge	Viton: 990-021-006
Seal kit - Cartridge	Buna: 990-021-007
Seal kit - Cartridge	EPDM: 990-021-014
Seal kit - Cartridge	Polyurethane: 990-021-002
Seal kit - Cartridge	Viton: 990-021-006

# OPTION SELECTION EXAMPLE: RVCD8WN

MINIMUM CONTROL PRESSURE


(W) SEAL MATERIAL

(N)

W 100 psi (7 bar)  
D 25 psi (1,7 bar)

N Buna-N  
E EPDM  
V Viton

## PERFORMANCE CURVES

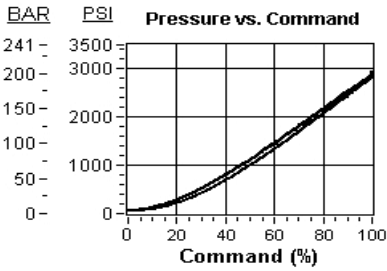

Pilot control provided by  
Proportional Pilot Relief, Model RBAP-MAN

