

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	T-22A
Series	2
Capacity	120 L/min.
Maximum Operating Pressure	350 bar
Control Pilot Flow	0,16 - 0,25 L/min.
Main stage leakage at 110 SUS (24 cSt)	50 cc/min.@70 bar
Pilot Control Cavity	T-8A
Pilot Control Valve Hex Size	22,2 mm
Pilot Control Valve Installation Torque	27 - 33 Nm
Response Time - Typical	10 ms
Valve Hex Size	28,6 mm
Valve Installation Torque	61 - 68 Nm
Model Weight	0.26 kg.
Seal kit - Cartridge	Buna: 990-022-007
Seal kit - Cartridge	EPDM: 990-022-014
Seal kit - Cartridge	Polyurethane: 990-022-002
Seal kit - Cartridge	Viton: 990-022-006

OPTION SELECTION EXAMPLE: RVED8WN

MINIMUM CONTROL PRESSURE


(W) SEAL MATERIAL

(N)

W	100 psi (7 bar)
D	25 psi (1,7 bar)

N	Buna-N
E	EPDM
V	Viton

PERFORMANCE CURVES

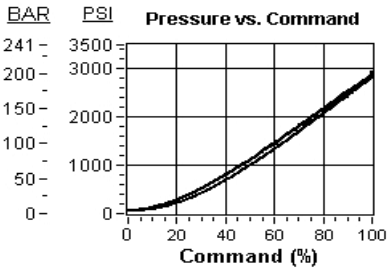

Pilot control provided by
Proportional Pilot Relief, Model RBAP-MAN

