

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	T-24A
Series	4
Capacity	480 L/min.
Maximum Operating Pressure	350 bar
Main stage leakage at 110 SUS (24 cSt)	80 cc/min.@70 bar
Pilot Control Cavity	T-8A
Pilot Control Valve Hex Size	22,2 mm
Pilot Control Valve Installation Torque	27 - 33 Nm
Response Time - Typical	10 ms
Valve Hex Size	41,3 mm
Valve Installation Torque	474 - 508 Nm
Model Weight	1.48 kg.
Seal kit - Cartridge	Buna: 990-024-007
Seal kit - Cartridge	Polyurethane: 990-024-002
Seal kit - Cartridge	Viton: 990-024-006

OPTION SELECTION EXAMPLE: RVID8WN

MINIMUM CONTROL PRESSURE

(W) SEAL MATERIAL

(N)


W 100 psi (7 bar)

N Buna-N

D 25 psi (1,7 bar)

V Viton

PERFORMANCE CURVES

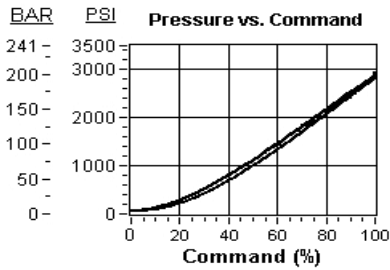

Pilot control provided by
Proportional Pilot Relief, Model RBAP-MAN

