
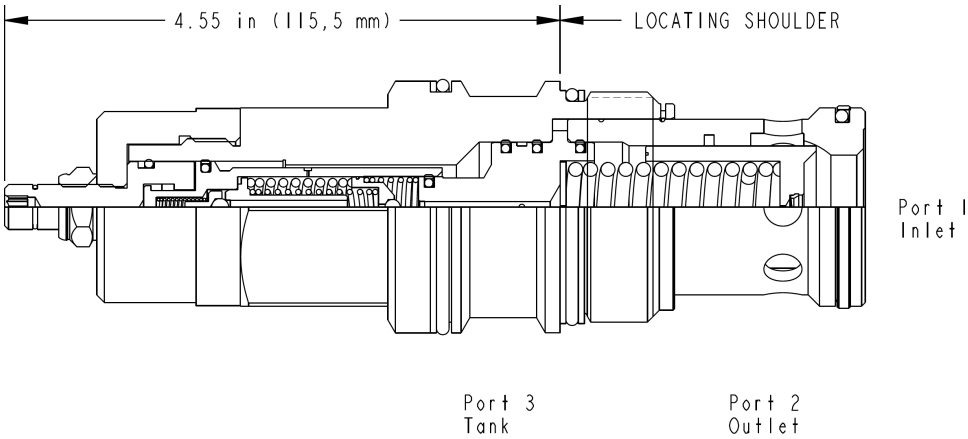




CONFIGURATION

L	
A	500 - 3000 psi (35 - 210 bar), 1000 psi (70 bar)
N	
Material/Coating	

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-19A
	4
	480 L/min.
	350 bar
	400 - 850 ms
	15 L/min.
	0,25 - 0,33 L/min.
	2 ms
-	5
	41,3 mm
	474 - 508 Nm
	4 mm
	15 mm
	9 - 10 Nm
	1.60 kg.
Seal kit - Cartridge	Buna: 990-219-007
Seal kit - Cartridge	Viton: 990-219-006

OPTION SELECTION EXAMPLE: RVITLAN

(L)		(A)	(N)	MATERIAL/COATING
L		A		Standard Material/Coating
C	-	500 - 3000 psi (35 - 210 bar), 1000 psi (70 bar)	N	
		C	V	/AP
		1000 - 6000 psi (70 - 420 bar), 1000 psi (70 bar)		
		W		
		1000 - 4500 psi (70 - 315 bar), 1000 psi (70 bar)		

TECHNICAL FEATURES

-
- 2
- 3
-
- 12
-
-
-
- 21:1
-
- Sun /

PERFORMANCE CURVES

