
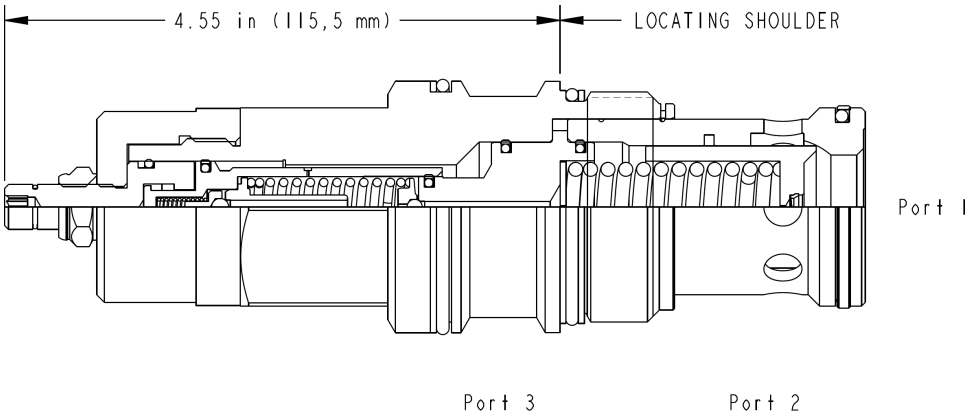




CONFIGURATION

L	
A	2000 - 3000 psi (140 - 210 bar), 2000 psi (140 bar)
N	
Material/Coating	

NOTE: DATA MAY VARY FROM LISTED DATA. SEE CONFIGURATION SECTION.

TECHNICAL DATA

	T-19A
	4
	480 L/min.
	350 bar
	200 - 400 ms
	15 L/min.
	0,16 - 0,41 L/min.
	2 ms
-	4.5
	41,3 mm
	474 - 508 Nm
	4 mm
	15 mm
	9 - 10 Nm
Seal kit - Cartridge	Buna: 990-219-007
Seal kit - Cartridge	Viton: 990-219-006

OPTION SELECTION EXAMPLE: SDJTLAN

(L)		(A)	(N)	MATERIAL/COATING
L		A		Standard Material/Coating
C		2000 - 3000 psi (140 - 210 bar), 2000 psi (140 bar)	N	/LH -
		C	V	
		4500 - 6000 psi (315 - 420 bar), 4500 psi (315 bar)		
		W		
		3000 - 4500 psi (210 - 315 bar), 3000 psi (210 bar)		

TECHNICAL FEATURES

- 3 1
- 3 1:1 3 5000 psi 350 bar
- 2
-
-
-
- 1 2
-
-
- 2
- Sun /

PERFORMANCE CURVES

