



sunhydraulics.com/model/X4HD



Meter in A Normally Open

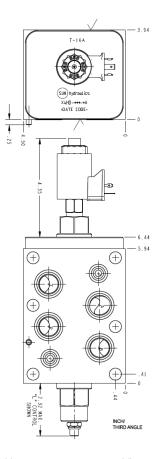

This assembly consists of a fully-adjustable, pressure-compensated flow control with reverse-flow check which provides precise flow regulation for meter-in or meter-out applications where there may be wide pressure fluctuations. It is infinitely adjustable from nearly closed up to the maximum flow. An integral high-capacity check valve provides unrestricted flow in the reverse direction. The rapid or feed rate is selected by a solenoid operated (normally open or closed) 2-way, 2-position valve.

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Body Type	Sandwich
Interface	ISO 08
Capacity	60 gpm
Body Features	Meter in A
Control Flow Range	0 - 25 gpm
Seal Plate Included (see notes)	No
Stack Height	3.94 in.

NOTES: • Seal retainer plate is not required for this assembly.

- *Important:* Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.
- For detailed information regarding the cartridges contained in this assembly, click on the models codes shown in the Included Components tab.

©2024 Sun Hydraulics 1 of 4





Solenoid-operated, rapid advance and feed flow control assembly

CAPACITY: 60 gpm

Continued from previous page

OPTION SELECTION EXAMPLE: X4HDLANFA224

 CONTROL
 (L)
 ADJUSTMENT RANGE
 (A)
 SEAL MATERIAL
 (N)

 L
 Standard Screw Adjustment
 A
 .2 - 25 gpm (0,8 - 95 L/min.)
 N
 Buna-N

 B
 .2 - 16 gpm (0,8 - 60 L/min.)
 V
 Viton

INCLUDED COMPONENTS

Part	Description	Quantity
500-001-114*	O-Ring	2
500-001-121*	O-Ring	4
811-001-002*	Locating Pin	1
DFEA8DN	Cartridge	1
DTAFMHN224	Cartridge	1
FDEALAN	Cartridge - Primary	1

TECHNICAL FEATURES

- The sharp-edged orifice design minimizes flow variations due to viscosity changes.
- A balanced adjustment mechanism allows for easy adjustment even at high pressures.
- Now available with FLeX Series solenoid valves. See CONFIGURATION section, SOLENOID DESIGNATION to specify.


MANIFOLD FACES

FACE GRID


5	6	7	8

©2024 Sun Hydraulics 2 of 4

FACE 5

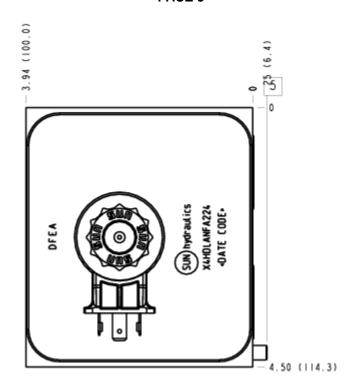


FACE 6

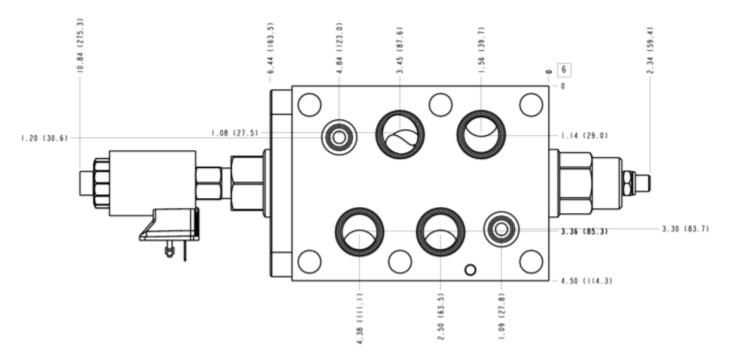


©2024 Sun Hydraulics 3 of 4

FACE 7

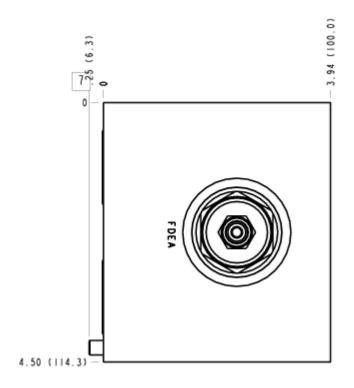

FACE 8

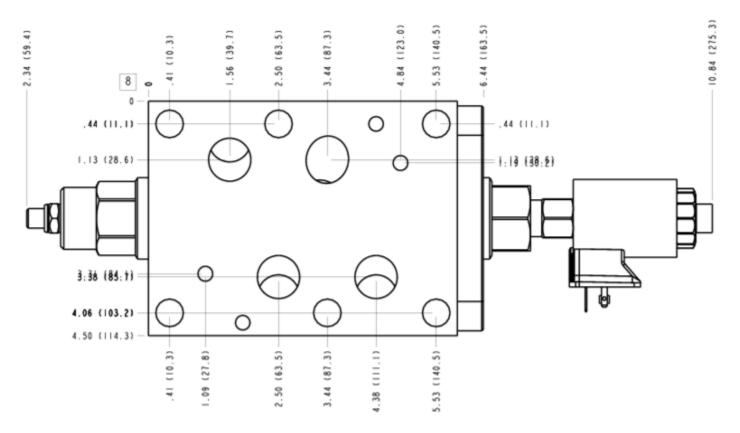

©2024 Sun Hydraulics 4 of 4