


Meter out A Normally Open

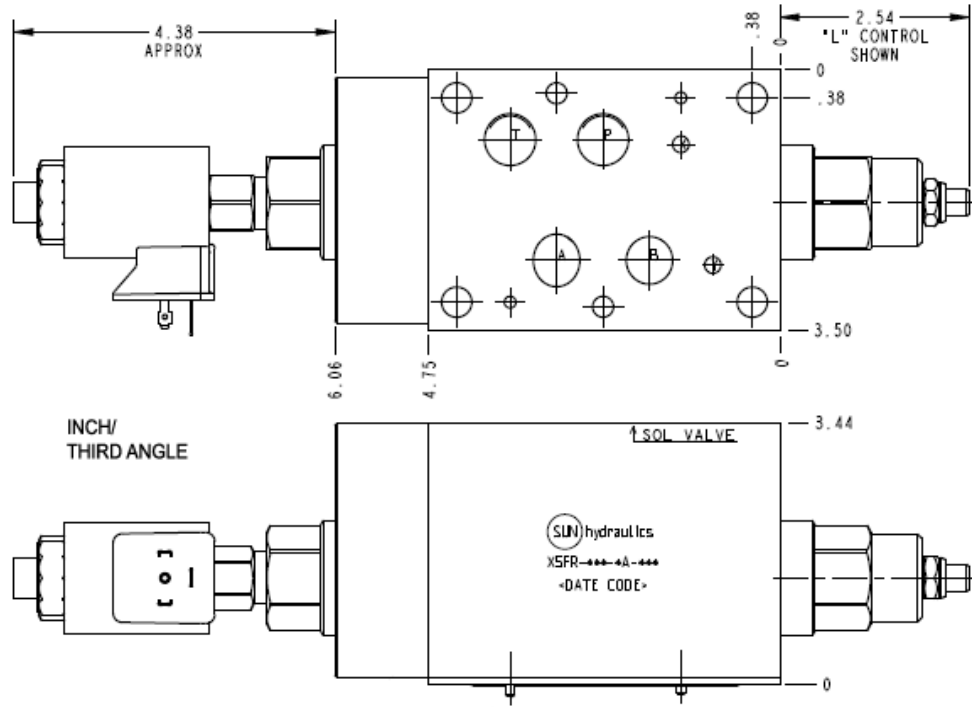

**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

|              |            |
|--------------|------------|
|              |            |
|              | ISO 07     |
| Stack Height | 90 mm      |
| ( )          |            |
|              | 0 - 30 gpm |
|              | A          |

**CONFIGURATION OPTIONS**

**Model Code Example: X5FRLCNFA224**

(L)

(C)

(N)

| L | C                  | N |
|---|--------------------|---|
| H | A 30 psi (2 bar)   | V |
|   | B 4 psi (0,3 bar)  |   |
|   | C 15 psi (1 bar)   |   |
|   | D 50 psi (3,5 bar) |   |
|   | E 75 psi (5 bar)   |   |

**INCLUDED COMPONENTS**

| Part         | Description         | Quantity |
|--------------|---------------------|----------|
| 500-001-111* | O-Ring              | 2        |
| 500-001-118* | O-Ring              | 4        |
| 700-006*     | Seal Plate          | 1        |
| 811-001-006* | Pin                 | 2        |
| DFEA8DN      | Cartridge           | 1        |
| DTAFMHN224   | Cartridge           | 1        |
| NCFBLCN      | Cartridge - Primary | 1        |