





TECHNICAL DATA

	ISO 05 - X&Y
()	
	0 - 12 gpm
	Meter in on B or meter out on A

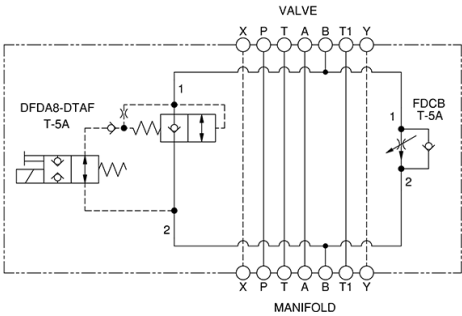

Meter In B Normally Open

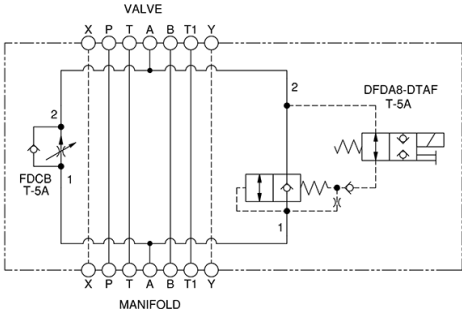

Meter Out A Normally Open

CONFIGURATION

L	
A	.2 - 12 gpm (0,8 - 45 L/min.)
N	
F	Solenoid Designation 740 Coil-Normally Open (with FDCB primary cartridge,
A	Port and Material Designation A Aluminum

)

CONFIGURATION OPTIONS

Model Code Example: X6EDLANFA

(L)		(A)	(N)
L		A .2 - 12 gpm (0,8 - 45 L/min.)	N
C	-	B .2 - 3 gpm (0,8 - 11 L/min.)	V
Y			

INCLUDED COMPONENTS

Part	Description	Quantity
DFDA8DN	Cartridge	1
DTAFMHN	Cartridge	1
FDCBLAN	Cartridge - Primary	1