



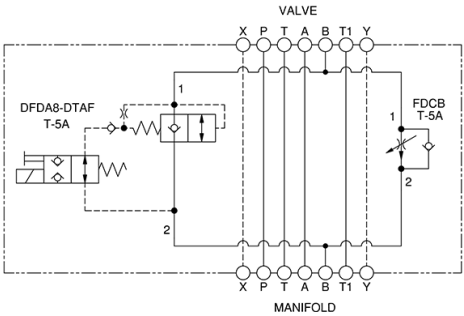

Meter In B Normally Open

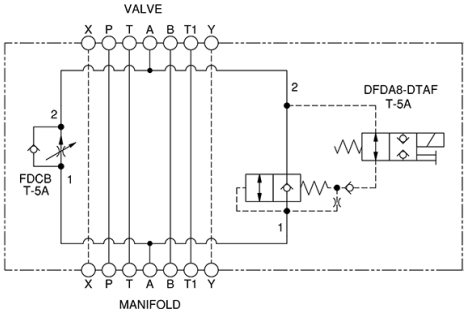

Meter Out A Normally Open

TECHNICAL DATA

Body Type	Sandwich
Interface	ISO 05 - X&Y
Capacity	120 L/min.
Body Features	Meter in on B or meter out on A
Control Flow Range	0 - 12 gpm
Seal Plate Included (see notes)	No
Stack Height	76 mm

CONFIGURATION

L	Control	Standard Screw Adjustment
A	Adjustment Range	.2 - 12 gpm (0,8 - 45 L/min.)
N	Seal Material	Buna-N
F	Solenoid Designation	740 Coil-Normally Open (with FDCB primary cartridge, Totalmente ajustable compensado por presión control de caudal válvula con anti-retorno de caudal inverso)
A	Port and Material Designation	A Aluminum



MODELO
X6ED

Solenoid-operated, avance rápido y regulado control de caudal ensamble con anti-retorno de caudal inverso
CAPACIDAD: 120 L/min.

Continued from
previous page

OPTION SELECTION EXAMPLE: X6EDLANFA

CONTROL		(L)	ADJUSTMENT RANGE	(A)	SEAL MATERIAL	(N)
L	Standard Screw Adjustment	A	.2 - 12 gpm (0,8 - 45 L/min.)	N	Buna-N	
C	Tamper Resistant - Factory Set	B	.2 - 3 gpm (0,8 - 11 L/min.)	V	Viton	
Y	manilla de tres agarres					

INCLUDED COMPONENTS

Part	Description	Quantity
DFDA8DN	Cartridge	1
DTAFMHN	Cartridge	1
FDCBLAN	Cartridge - Primary	1