



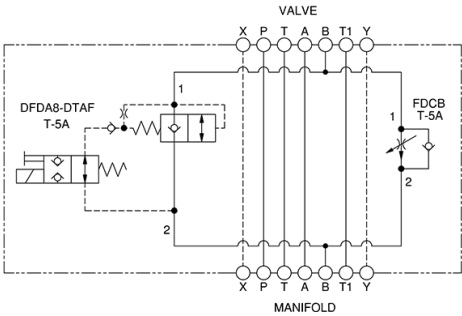

Meter In B Normally Open

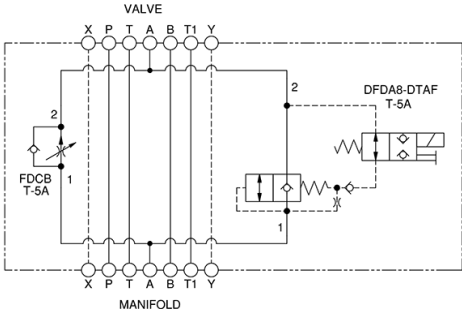

Meter Out A Normally Open

TECHNICAL DATA

|              |                                 |
|--------------|---------------------------------|
|              |                                 |
|              | ISO 05 - X&Y                    |
|              | 120 L/min.                      |
| ( )          |                                 |
|              | 0 - 12 gpm                      |
|              | Meter in on B or meter out on A |
| Stack Height | 76 mm                           |

NOTE:

DATA

MAY

VARY

BY

CONFIGURATION

|   |                                                                           |
|---|---------------------------------------------------------------------------|
| L |                                                                           |
| A | .2 - 12 gpm (0,8 - 45 L/min.)                                             |
| N |                                                                           |
| F | Solenoid Designation 740 Coil-Normally Open (with FDCB primary cartridge, |
| A | Port and Material Designation A Aluminum                                  |

CONFIGURATION. SEE  
CONFIGURATION SECTION.

OPTION SELECTION EXAMPLE: X6EDLANFA

| (L) |   | (A) | (N) |
|-----|---|-----|-----|
| L   |   | A   | N   |
| C   | - | B   | V   |
| Y   |   |     |     |

INCLUDED COMPONENTS

| Part    | Description         | Quantity |
|---------|---------------------|----------|
| DFDA8DN | Cartridge           | 1        |
| DTAFMHN | Cartridge           | 1        |
| FDCBLAN | Cartridge - Primary | 1        |

TECHNICAL FEATURES

- FLeX