


Meter Out B Normally Open

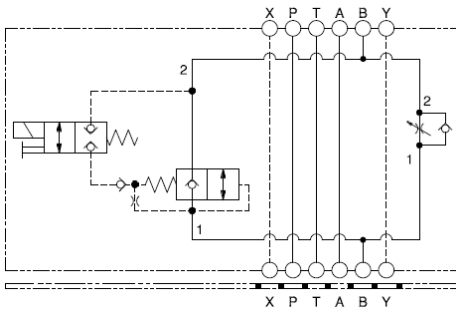

Meter Out B Normally Closed

This assembly consists of a fully-adjustable needle valve with reverse-flow check which provides precise flow regulation for meter-in or meter-out applications. It is infinitely adjustable from nearly closed up to the maximum flow. An integral high-capacity check valve provides unrestricted flow in the reverse direction. The rapid or feed rate is selected by a solenoid operated (normally open or closed) 2-way, 2-position valve.

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Body Type	Sandwich
Interface	ISO 07
Capacity	60 gpm
Body Features	Meter out B
Control Flow Range	0 - 30 gpm
Seal Plate Included (see notes)	Yes
Stack Height	3.52 in.

- NOTES:**
- Stack height value in technical data table includes seal retainer plate.
 - For detailed information regarding the cartridges contained in this assembly, click on the models codes shown in the Included Components tab.
 - **Important:** Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

OPTION SELECTION EXAMPLE: X7FRLCNFA

CONTROL		(L) REVERSE FLOW CHECK	(C) SEAL MATERIAL	(N)	
L	Standard Screw Adjustment	C	30 psi (2 bar)	N	Buna-N
H	Calibrated Handknob with Detent Lock	A	4 psi (0,3 bar)	V	Viton
K	Handknob	B	15 psi (1 bar)		
Y	Tri-Grip Handknob	D	50 psi (3,5 bar)		

INCLUDED COMPONENTS

Part	Description	Quantity
500-001-111*	O-Ring	2
500-001-118*	O-Ring	4
700-006*	Seal Plate	1
811-001-006*	Pin	2
DFEA8DN	Cartridge	1
DTAFMHN	Cartridge	1
NCFBLCN	Cartridge - Primary	1

TECHNICAL FEATURES

- The sharp-edged orifice design minimizes flow variations due to viscosity changes.
- A balanced adjustment mechanism allows for easy adjustment even at high pressures.
- Because needle valves are non-compensating devices, the fixed orifice size will regulate flow through the valve in proportion to the square root of the pressure differential across ports 1 and 2.
- Now available with FLEx Series solenoid valves. See CONFIGURATION section, SOLENOID DESIGNATION to specify.