


**CONFIGURATION**

|   |                  |        |
|---|------------------|--------|
| X | Control          | -      |
| X | Adjustment Range | -      |
| N | Seal Material    | Buna-N |
|   | Material/Coating |        |

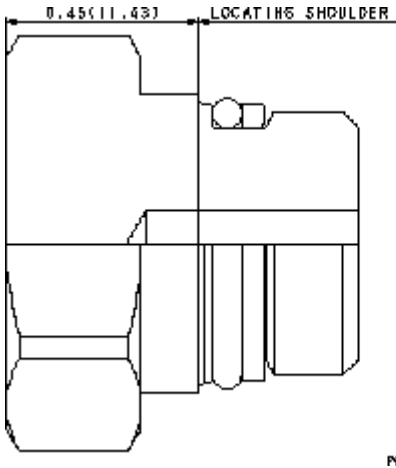

This cavity plug allows all ports to remain open.

**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

|                            |                           |
|----------------------------|---------------------------|
| Cavity                     | T-8A                      |
| Series                     | P                         |
| Maximum Operating Pressure | 5000 psi                  |
| Port Configuration         | 2 Port                    |
| Valve Hex Size             | 7/8 in.                   |
| Valve Installation Torque  | 20 - 25 lbf ft            |
| Seal kit - Cartridge       | Buna: 990-008-007         |
| Seal kit - Cartridge       | Polyurethane: 990-008-002 |
| Seal kit - Cartridge       | Viton: 990-008-006        |

OPTION SELECTION EXAMPLE: XAOAXXN

| CONTROL | (X) | ADJUSTMENT RANGE | (X) | SEAL MATERIAL | (N)    | MATERIAL/COATING | (/LH)                       |
|---------|-----|------------------|-----|---------------|--------|------------------|-----------------------------|
| X       | -   | X                | -   | N             | Buna-N | /LH              | Mild Steel, Zinc-Nickel     |
|         |     |                  |     | E             | EPDM   | /AP              | Stainless Steel, Passivated |
|         |     |                  |     | V             | Viton  |                  | Standard Material/Coating   |